

FIG. 1

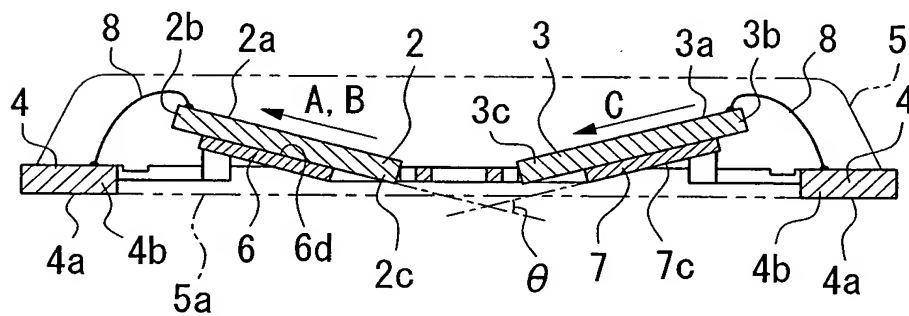


FIG. 2

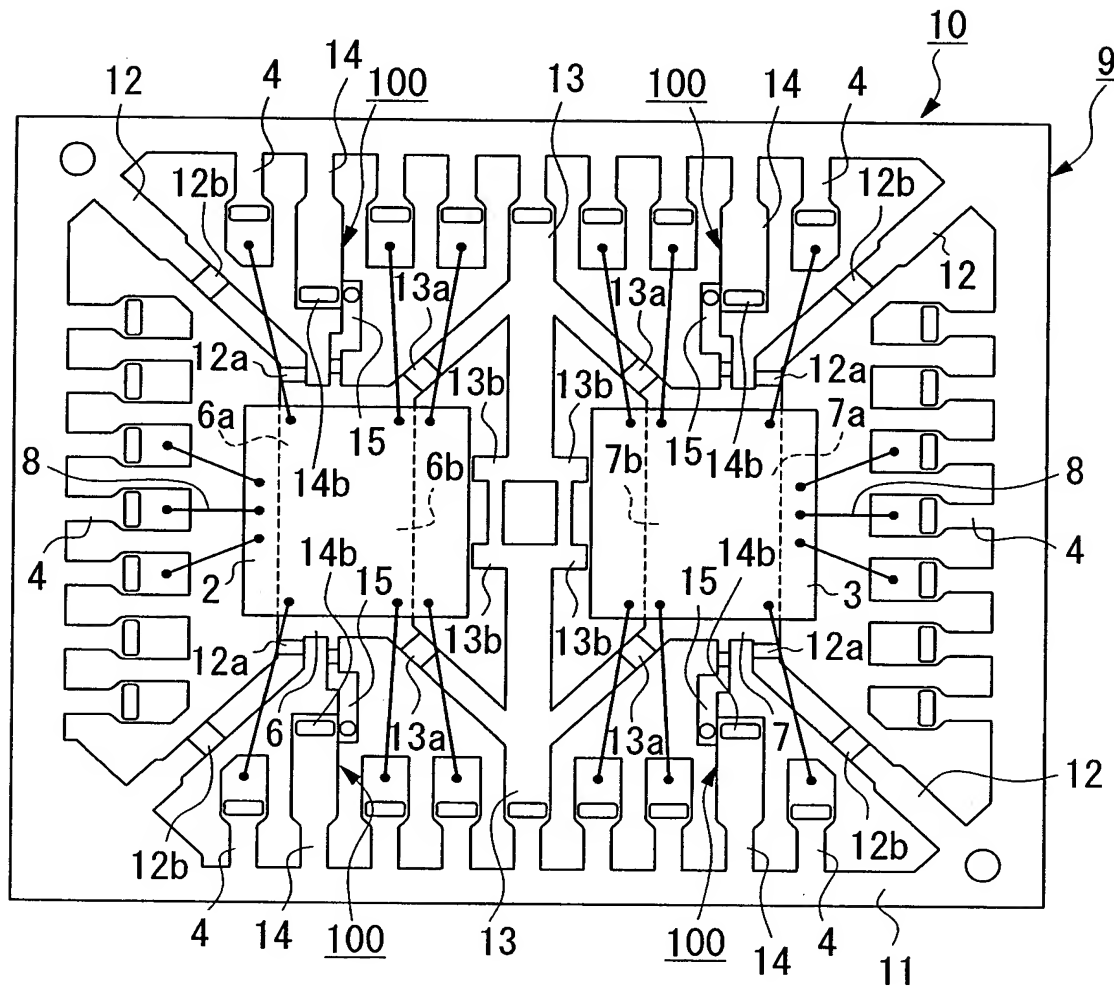


FIG. 3

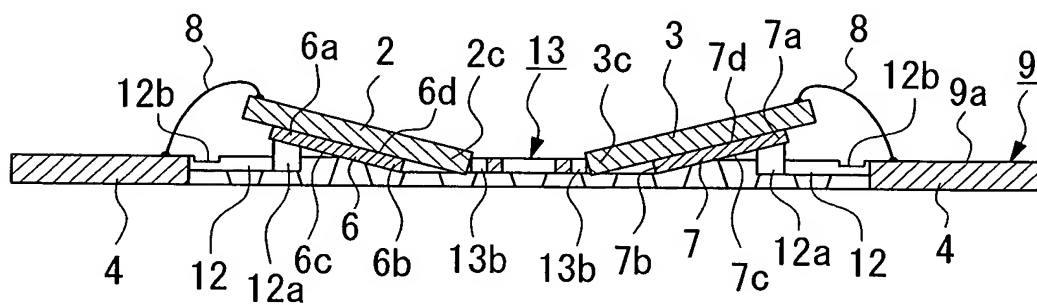


FIG. 4

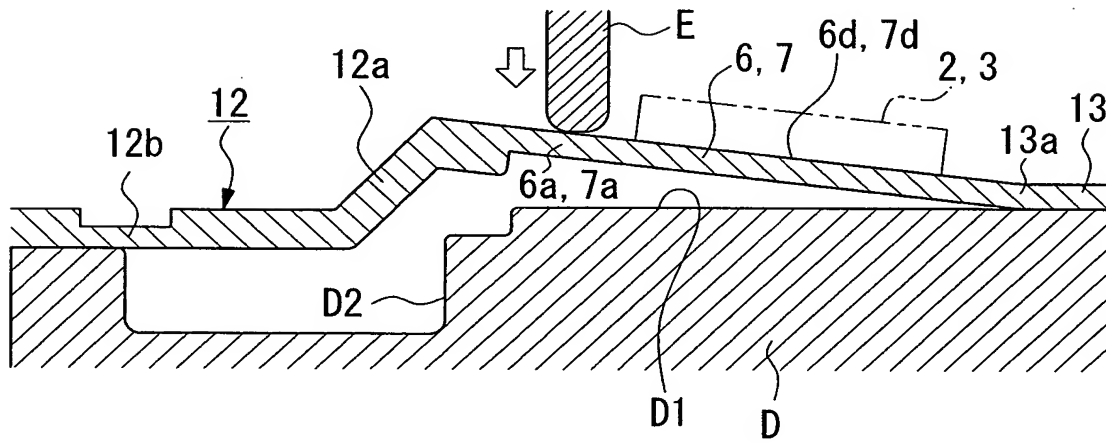


FIG. 5

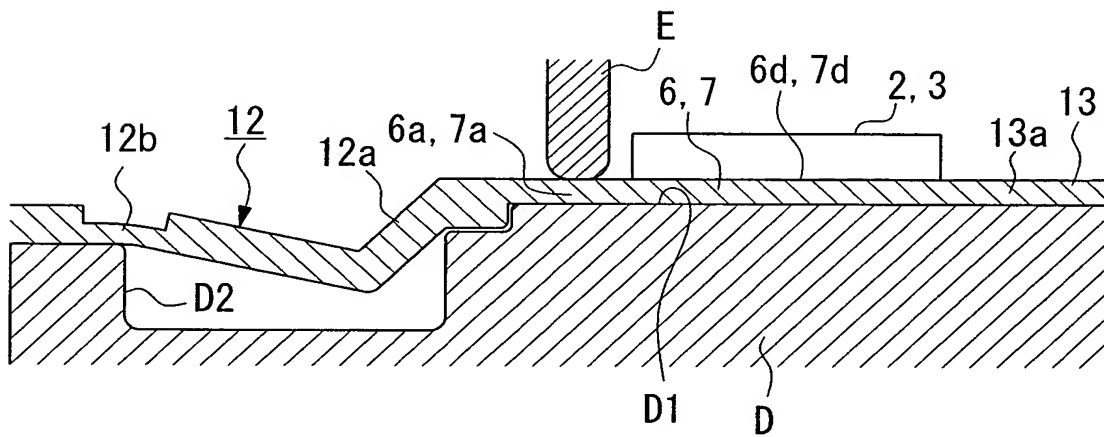


FIG. 6

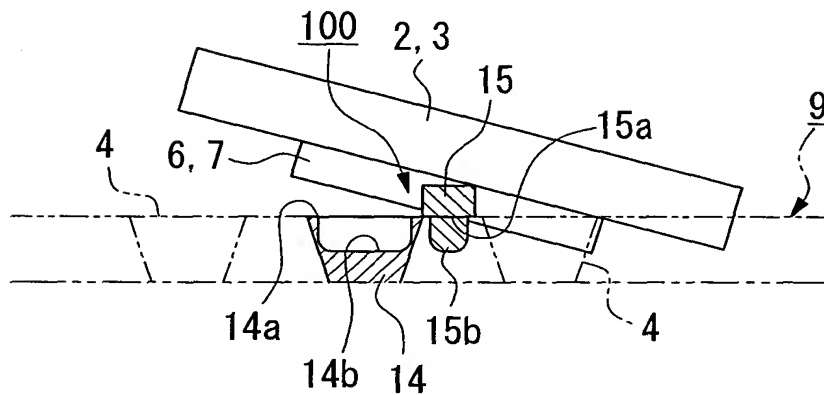


FIG. 7

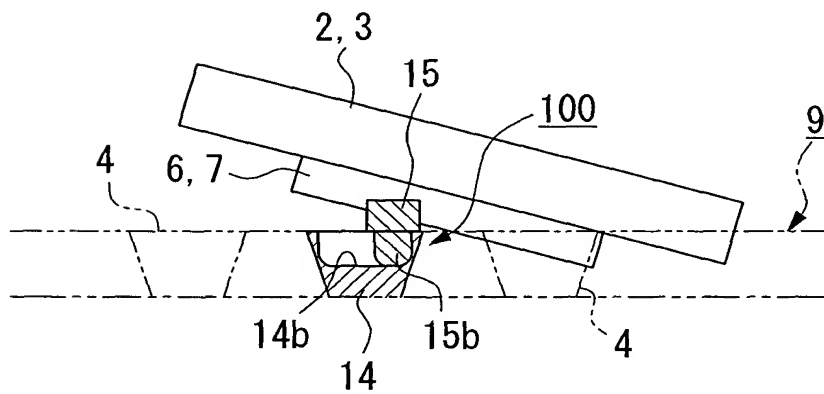


FIG. 8

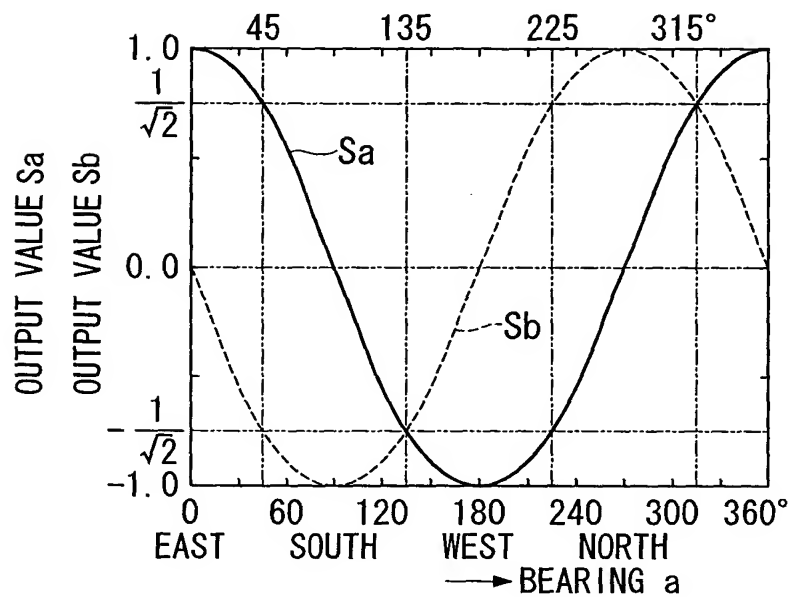


FIG. 9

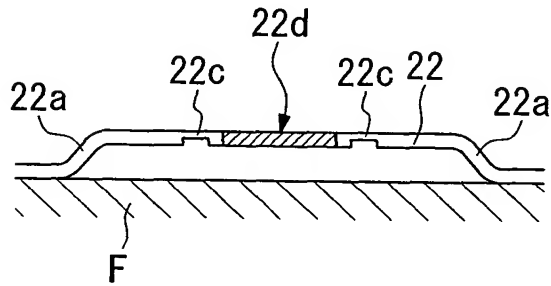


FIG. 12

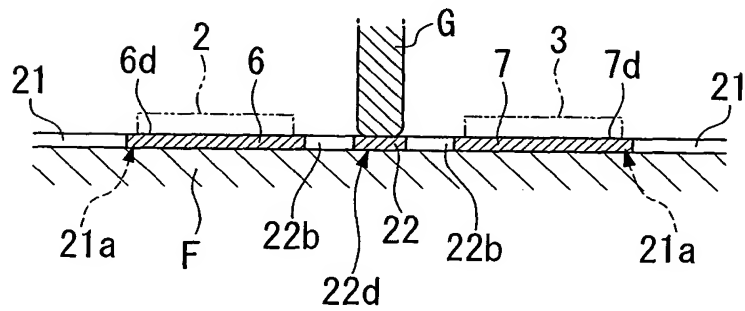


FIG. 13

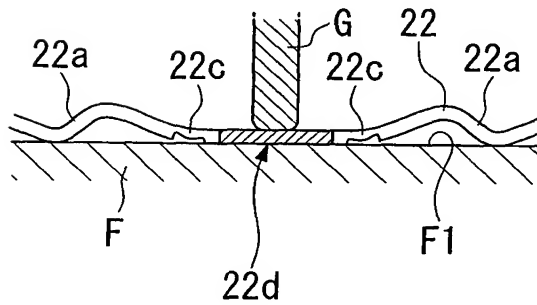


FIG. 14

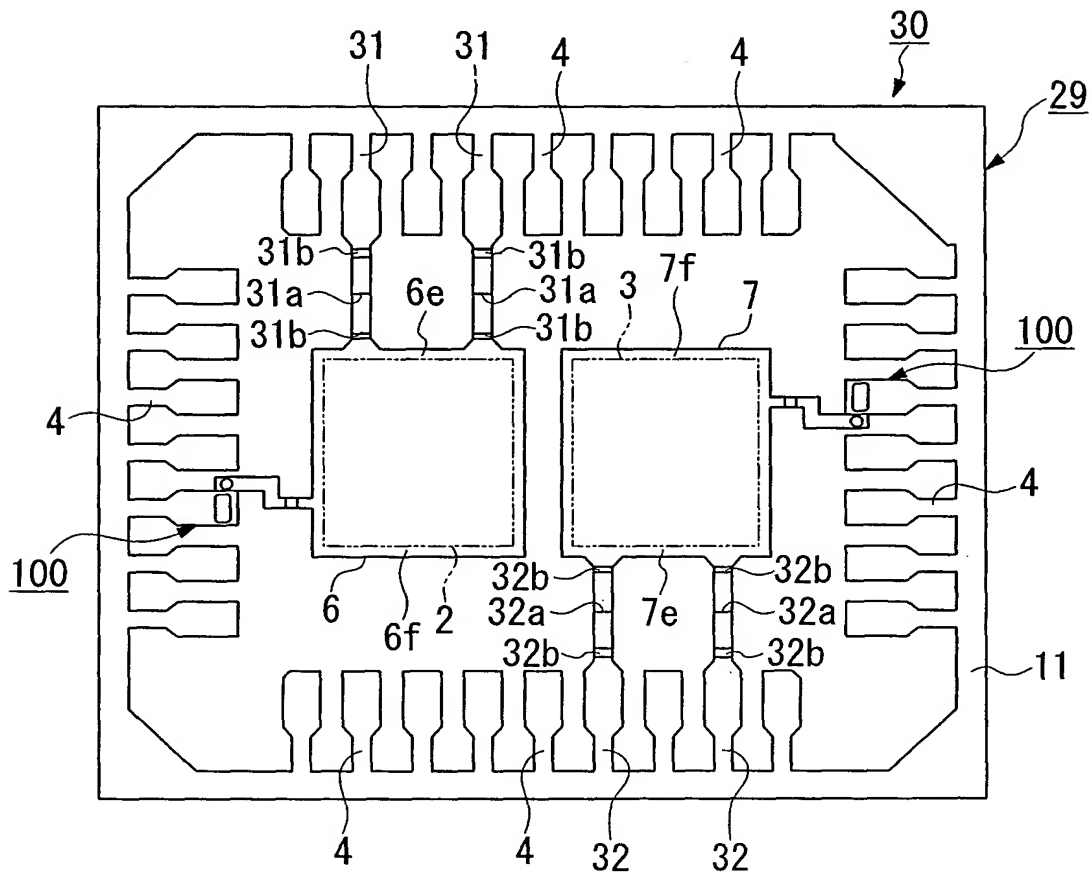


FIG. 15

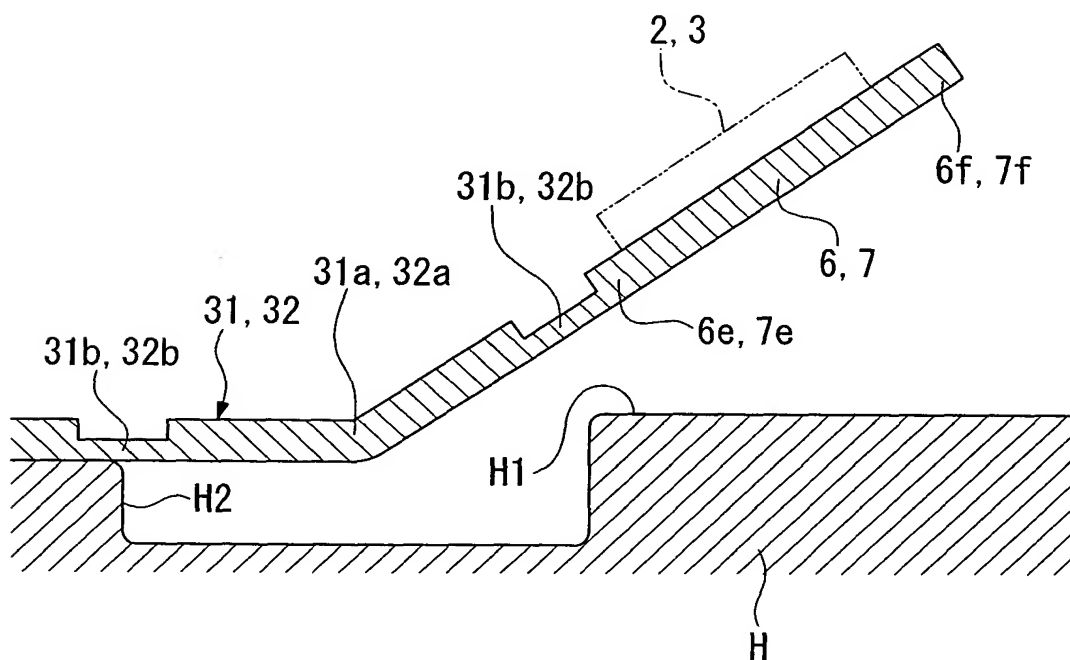


FIG. 16

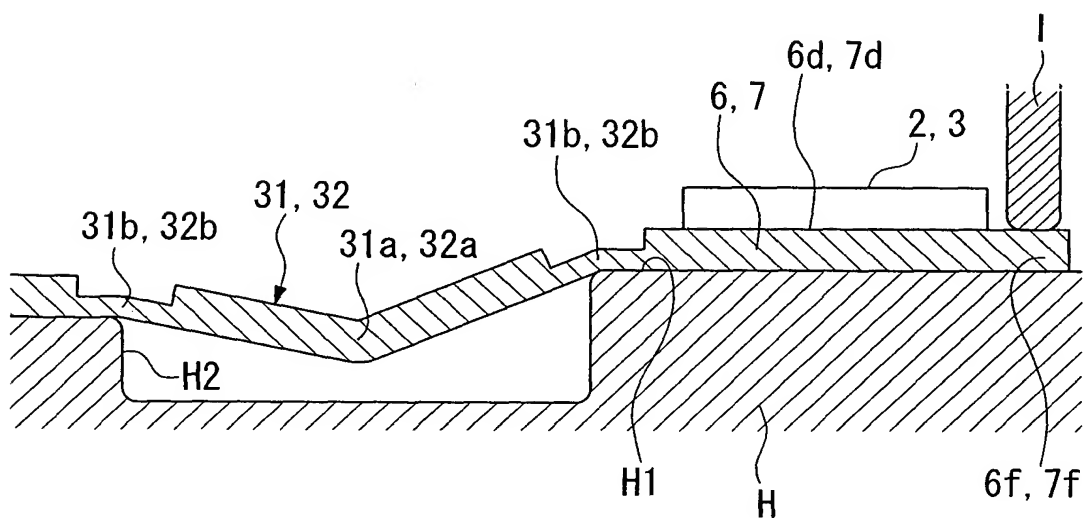


FIG. 17

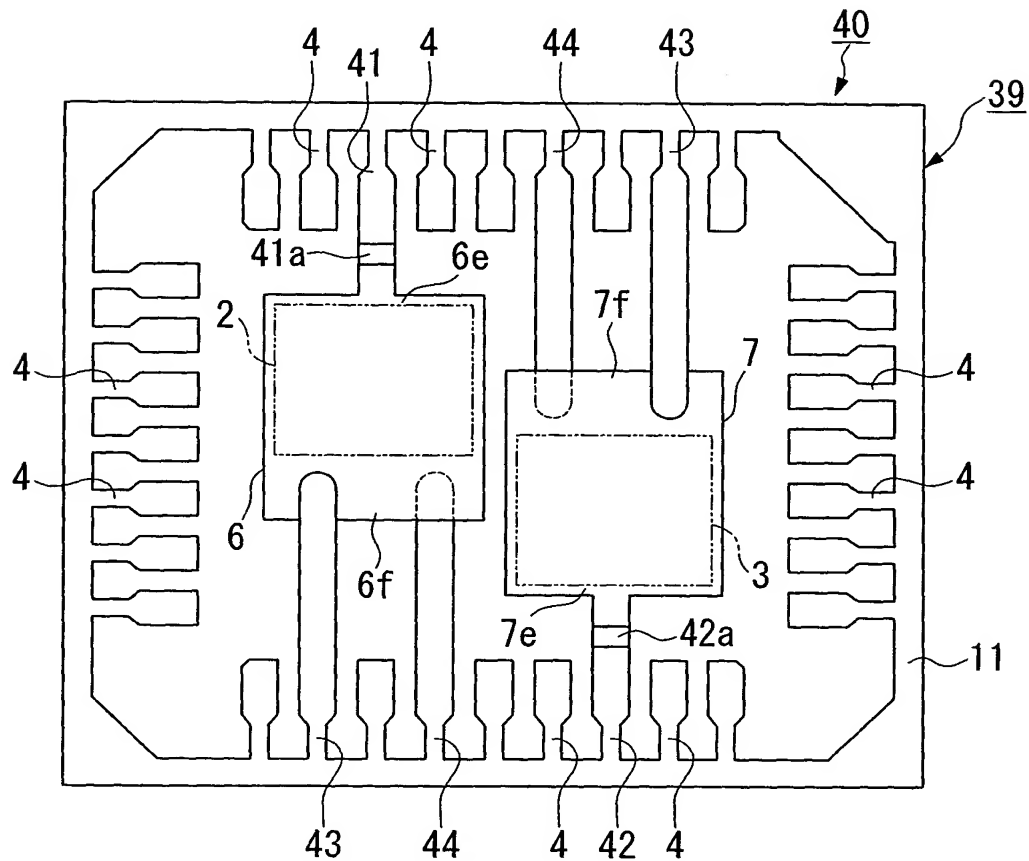


FIG. 18

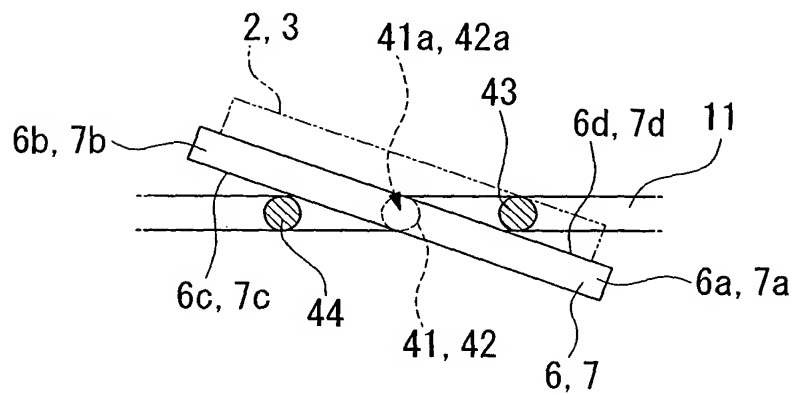


FIG. 19

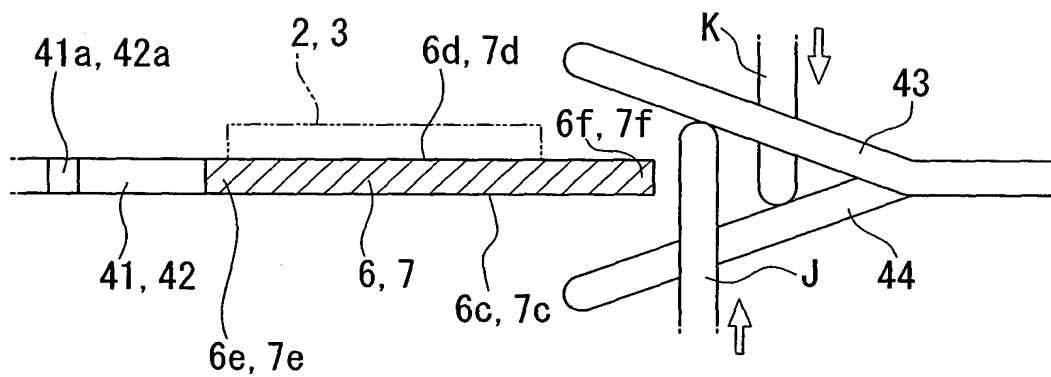


FIG. 20

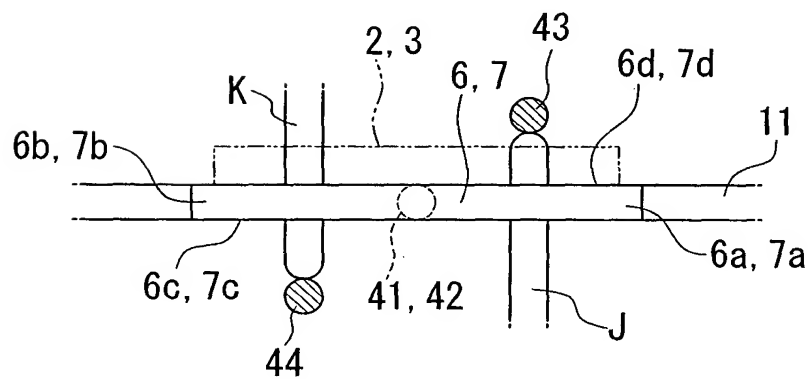


FIG. 21

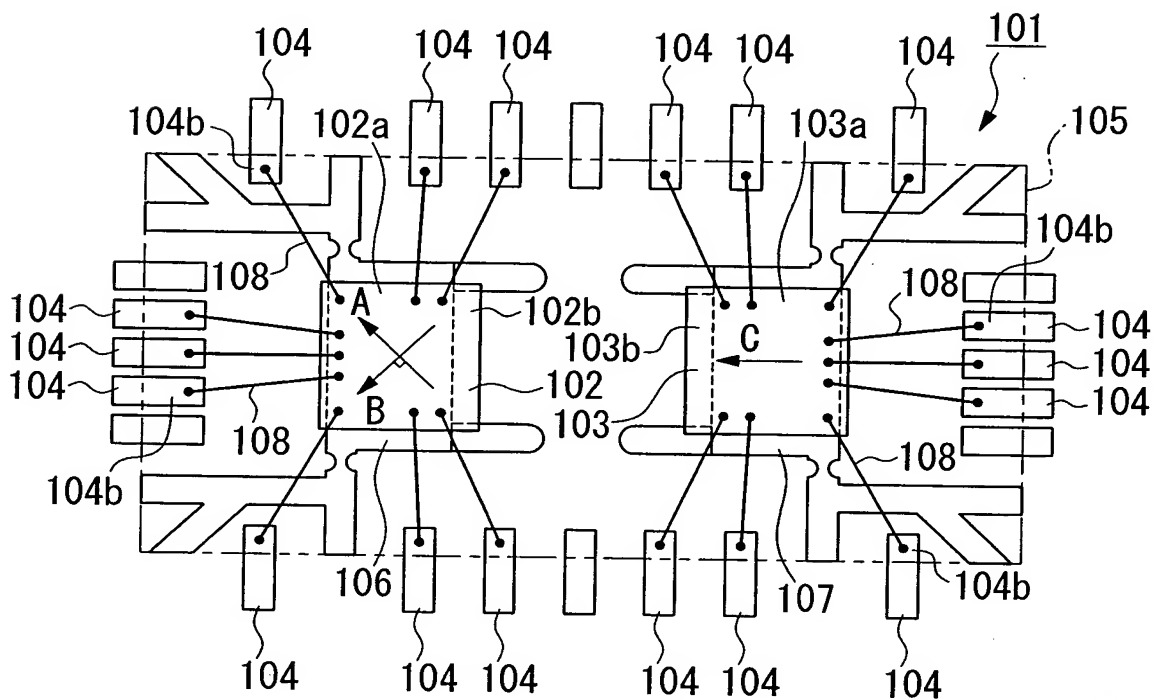


FIG. 22

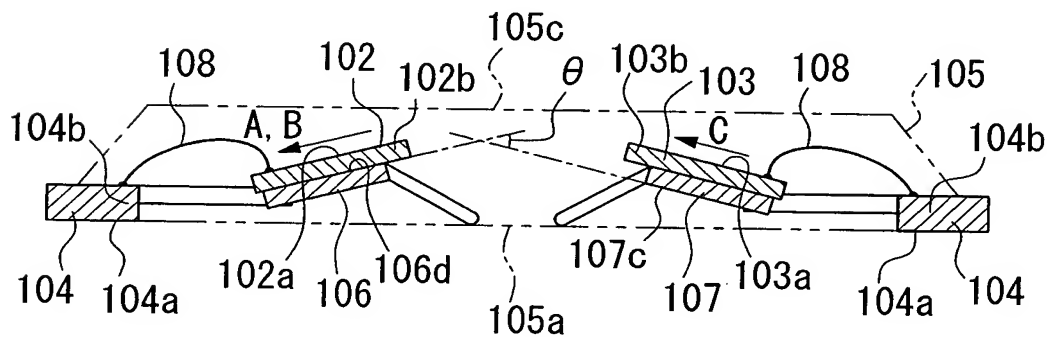


FIG. 23

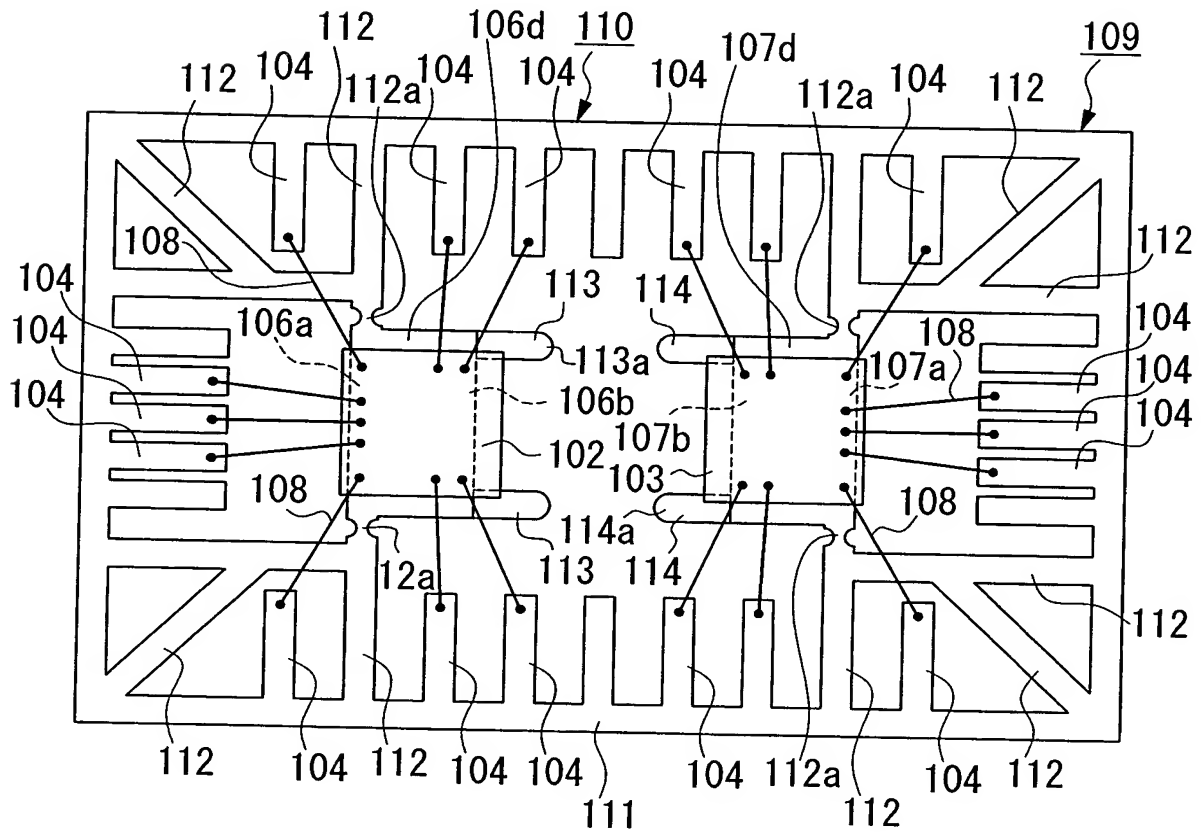


FIG. 24

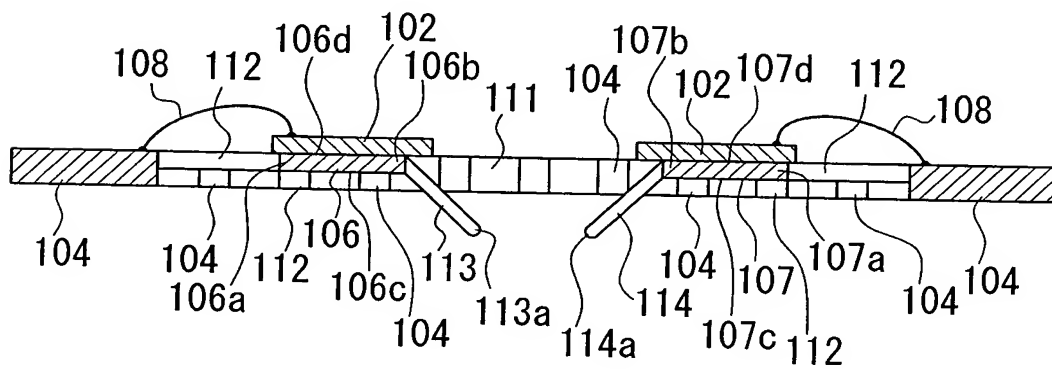


FIG. 25

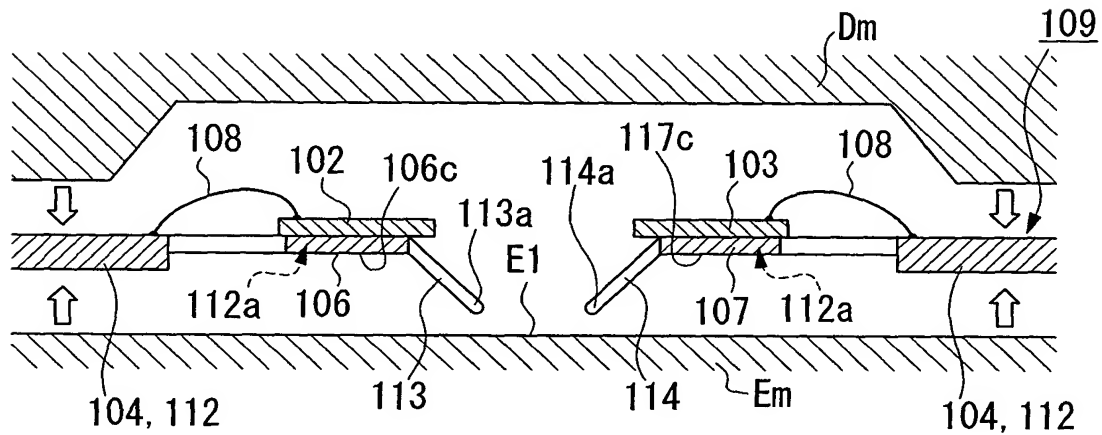


FIG. 26

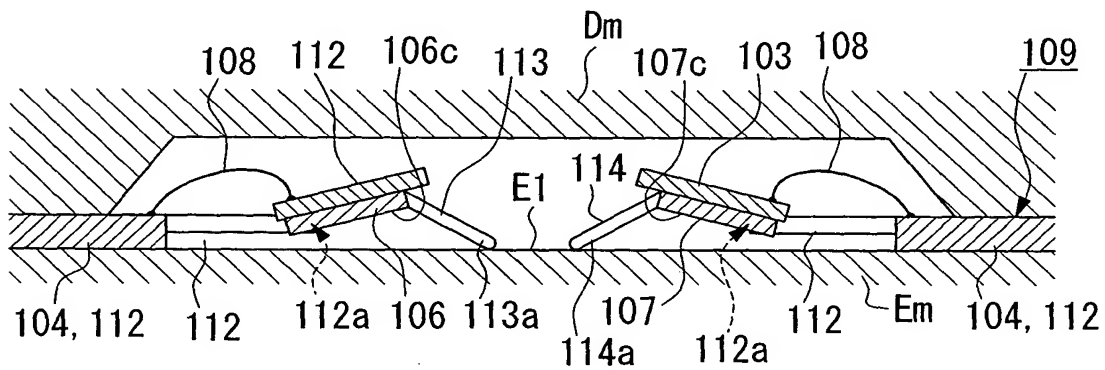


FIG. 27

Title: MANUFACTURING METHOD FOR MAGNETIC SENSOR
AND LEAD FRAME THEREFOR

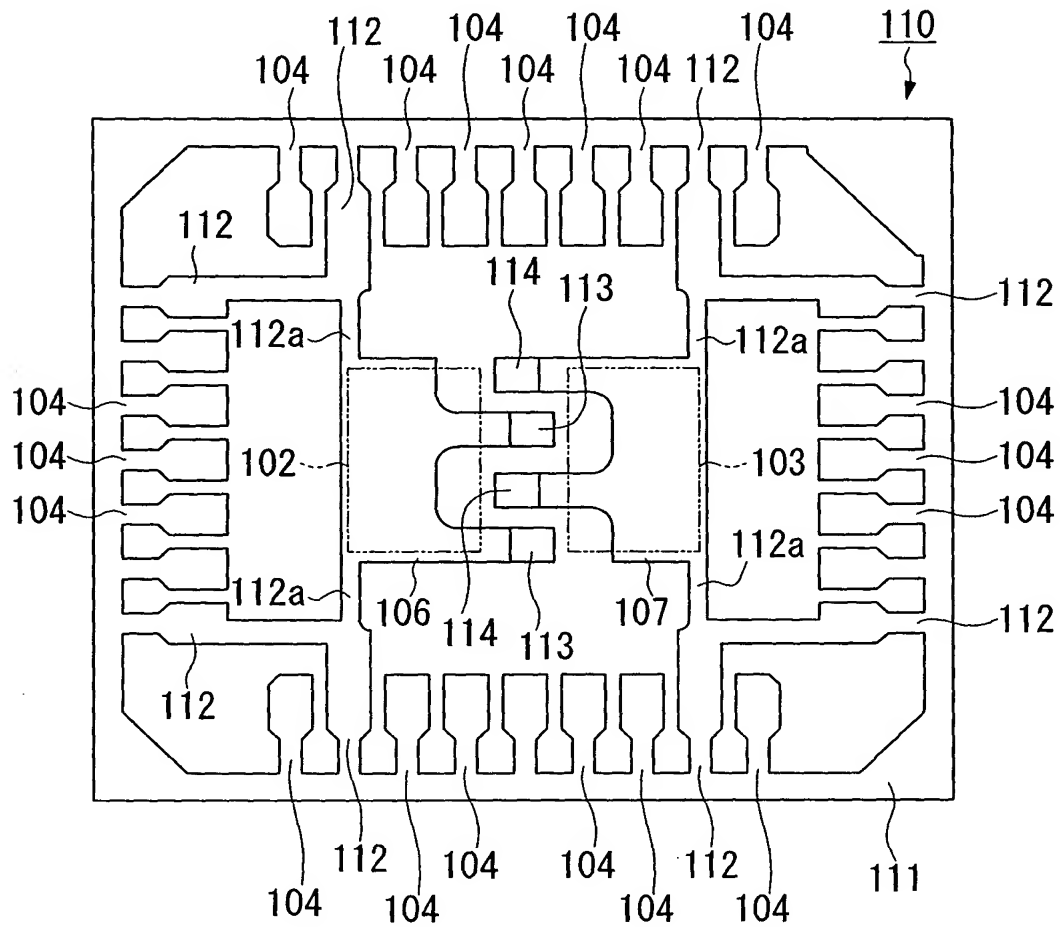


FIG. 28

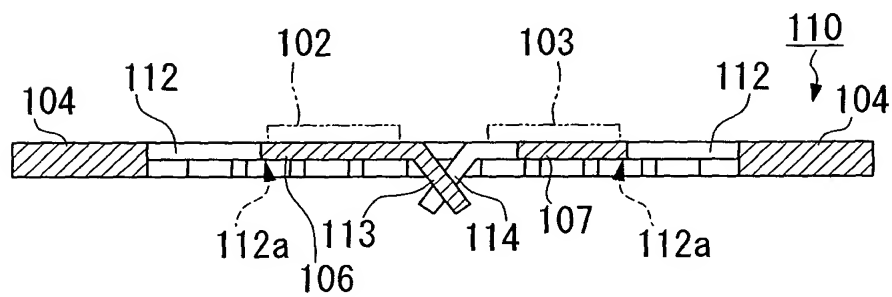


FIG. 29

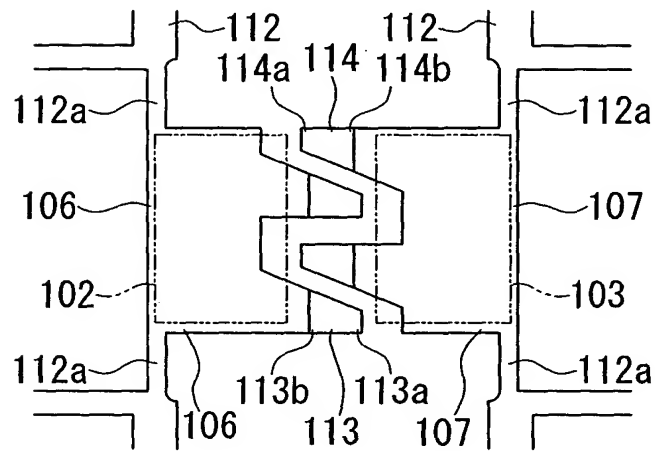


FIG. 30

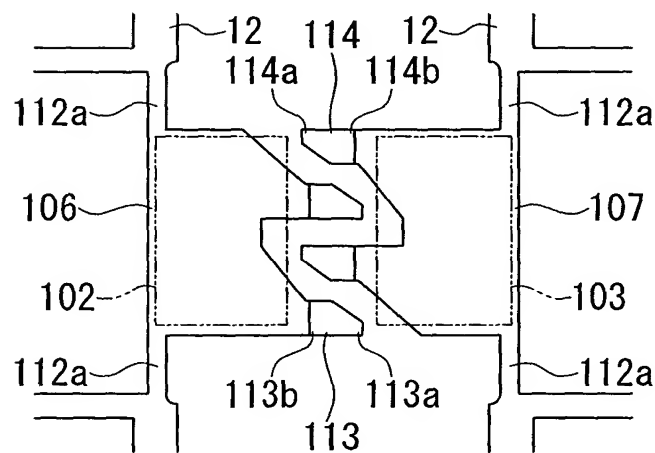


FIG. 31

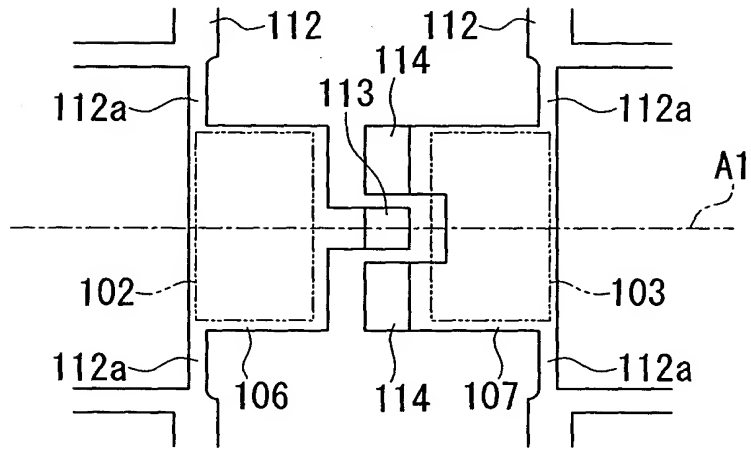


FIG. 32

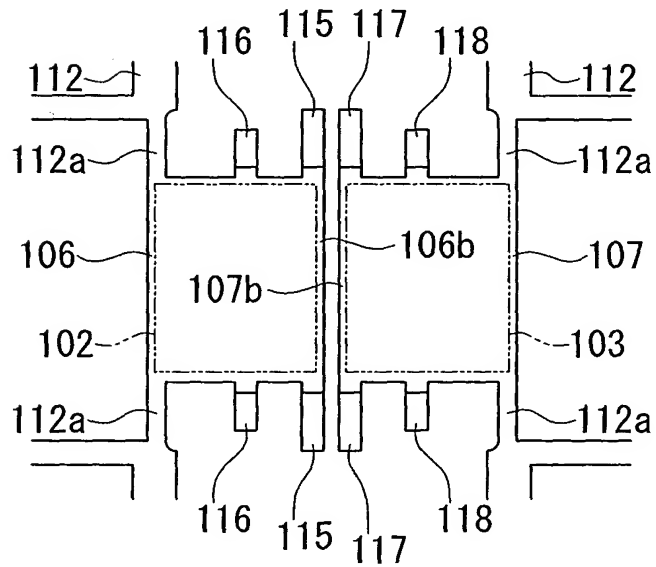


FIG. 33

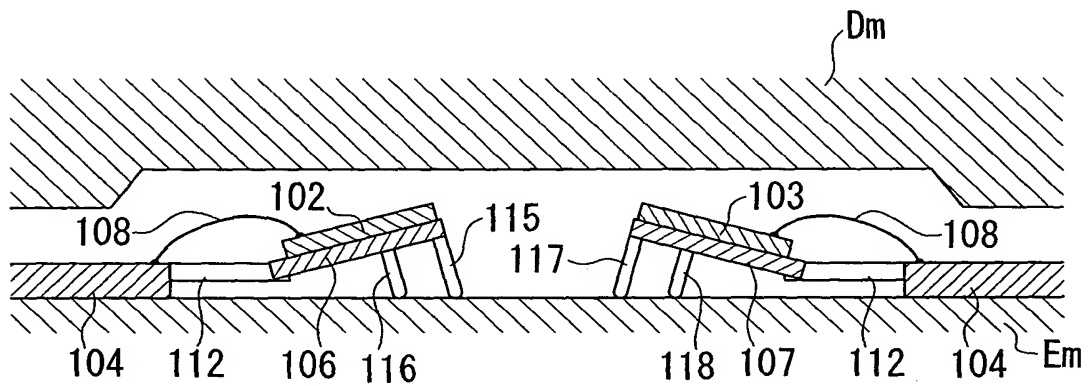


FIG. 34

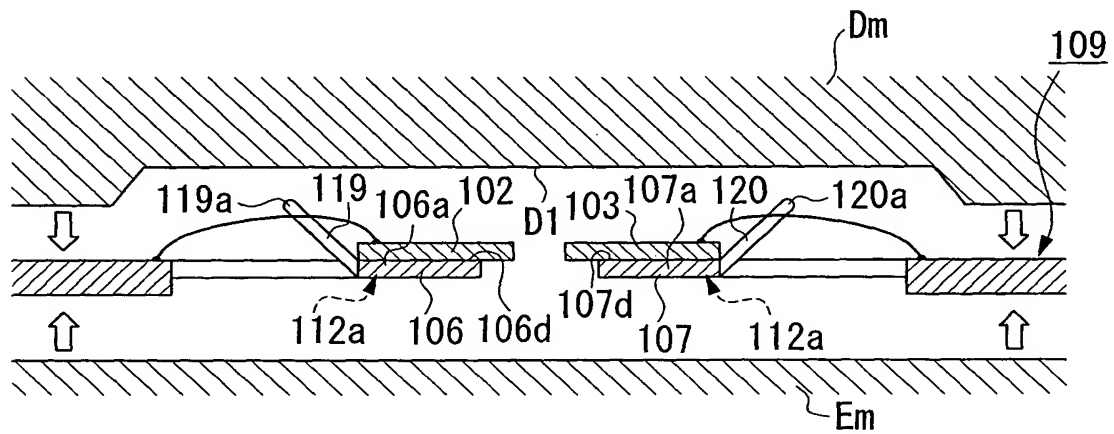


FIG. 35

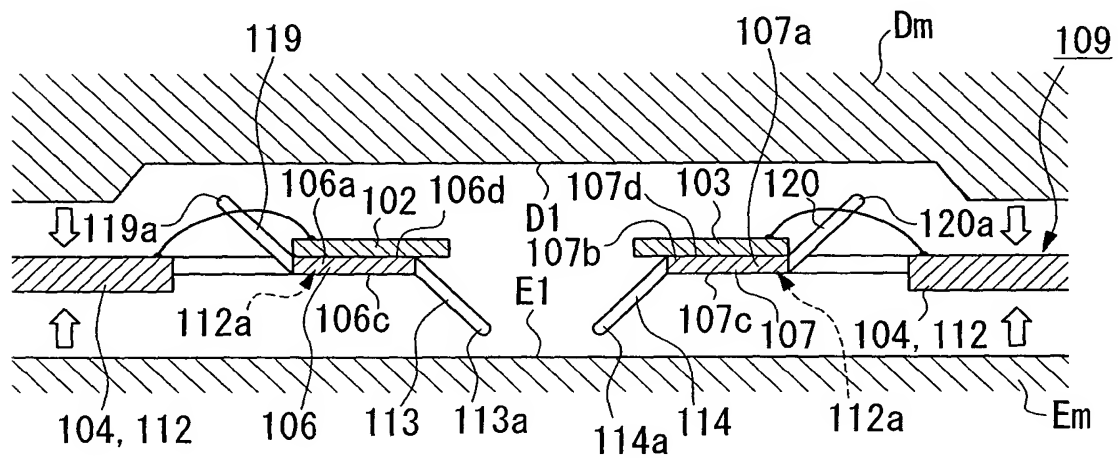


FIG. 36

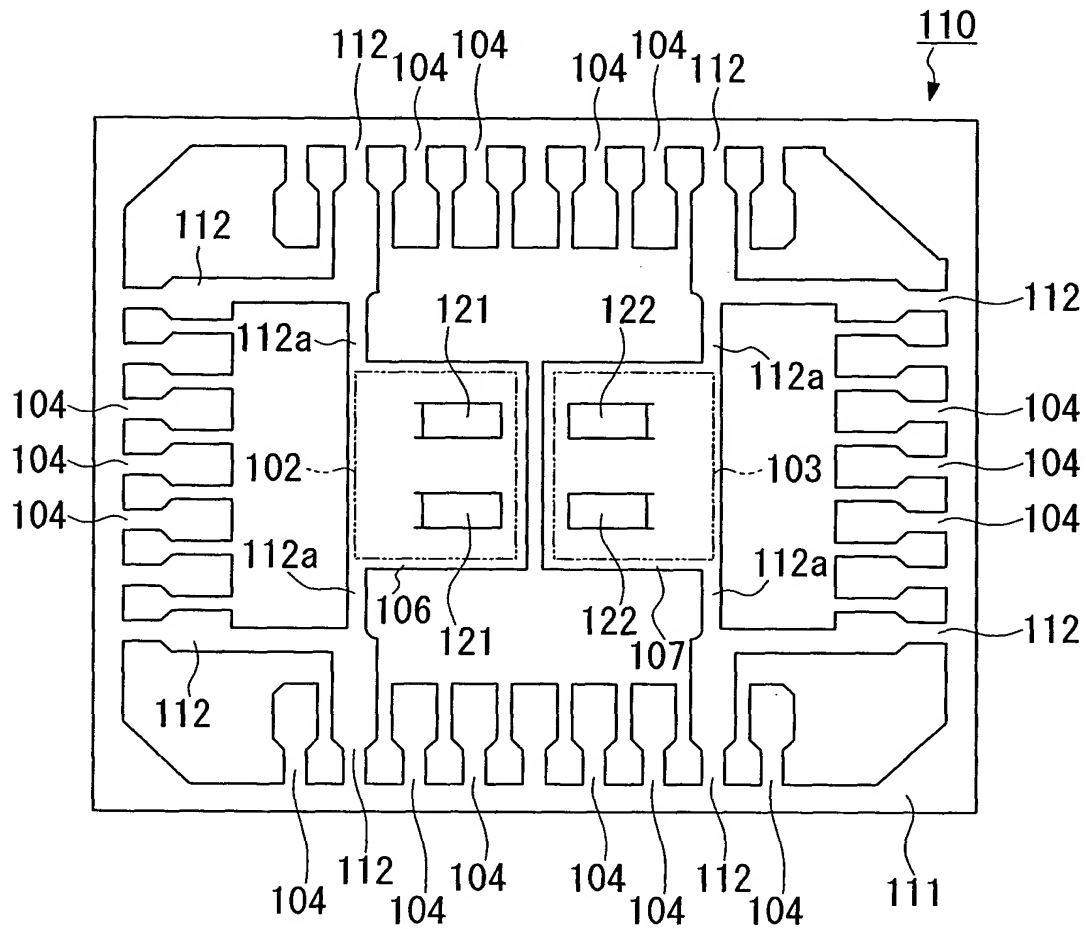


FIG. 37

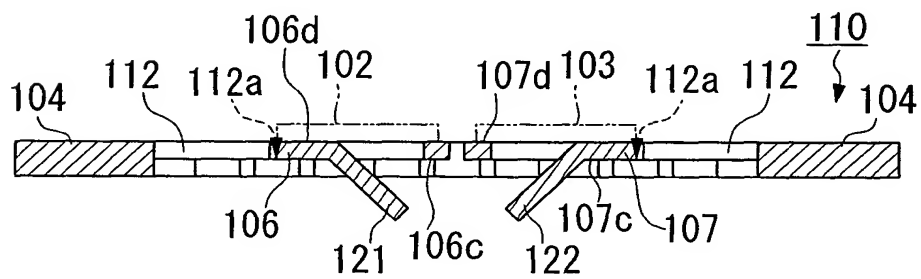


FIG. 38

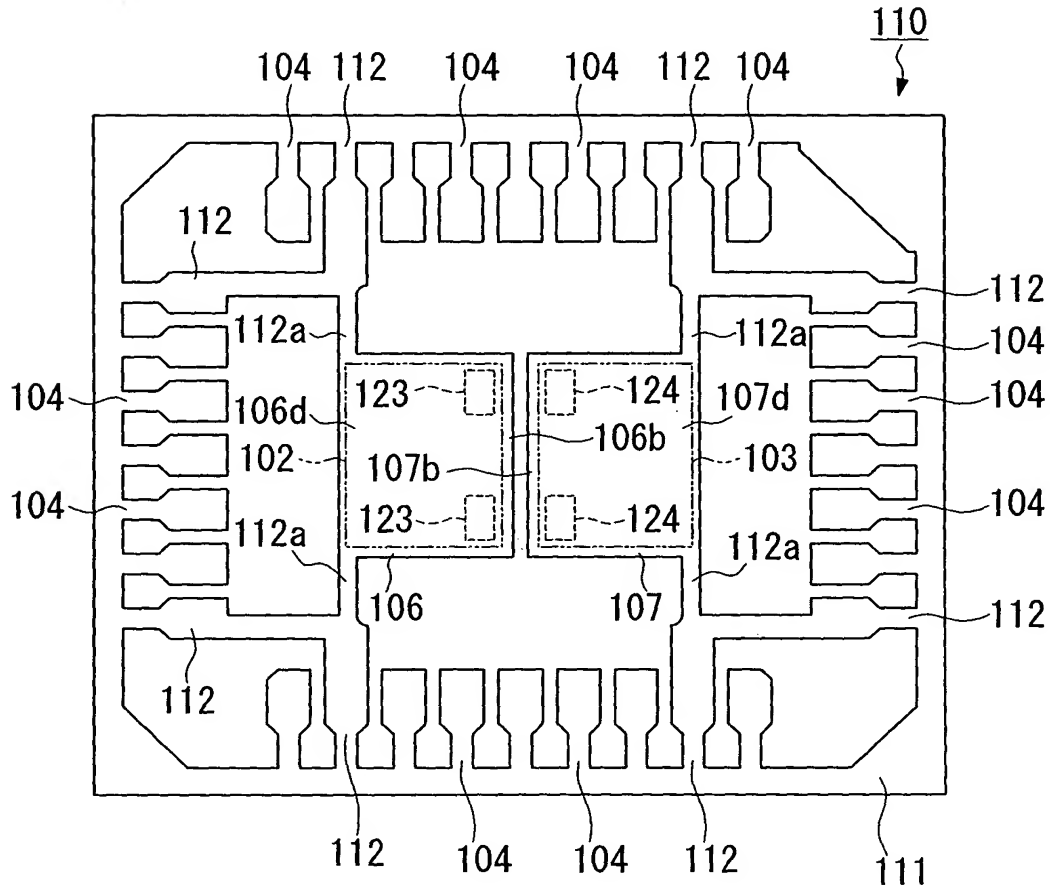


FIG. 39

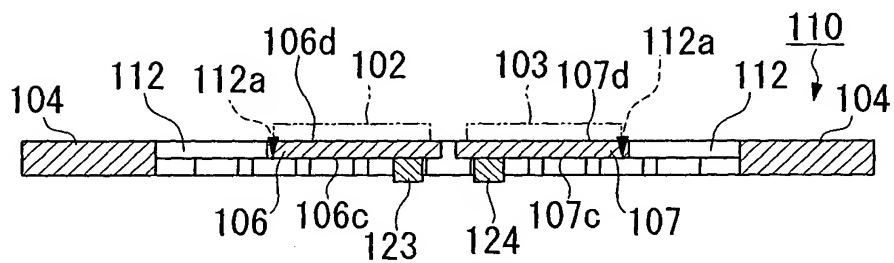


FIG. 40

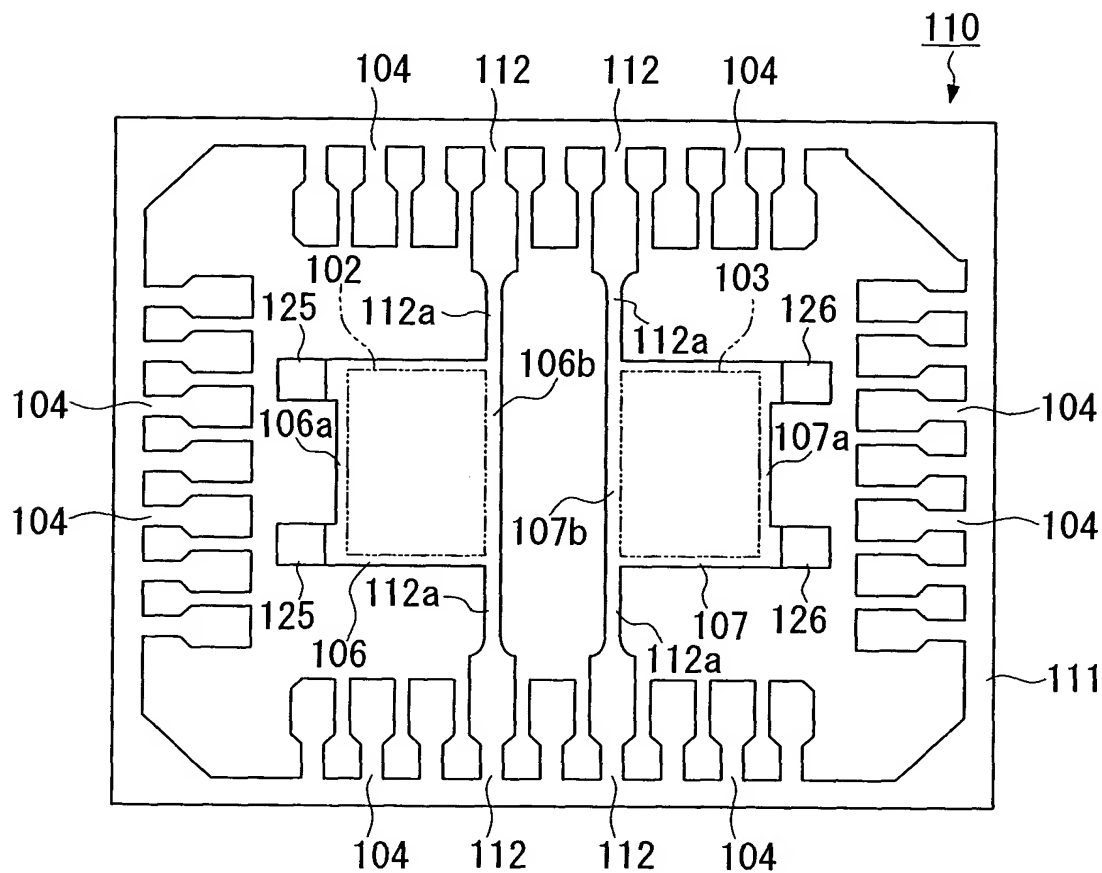


FIG. 41

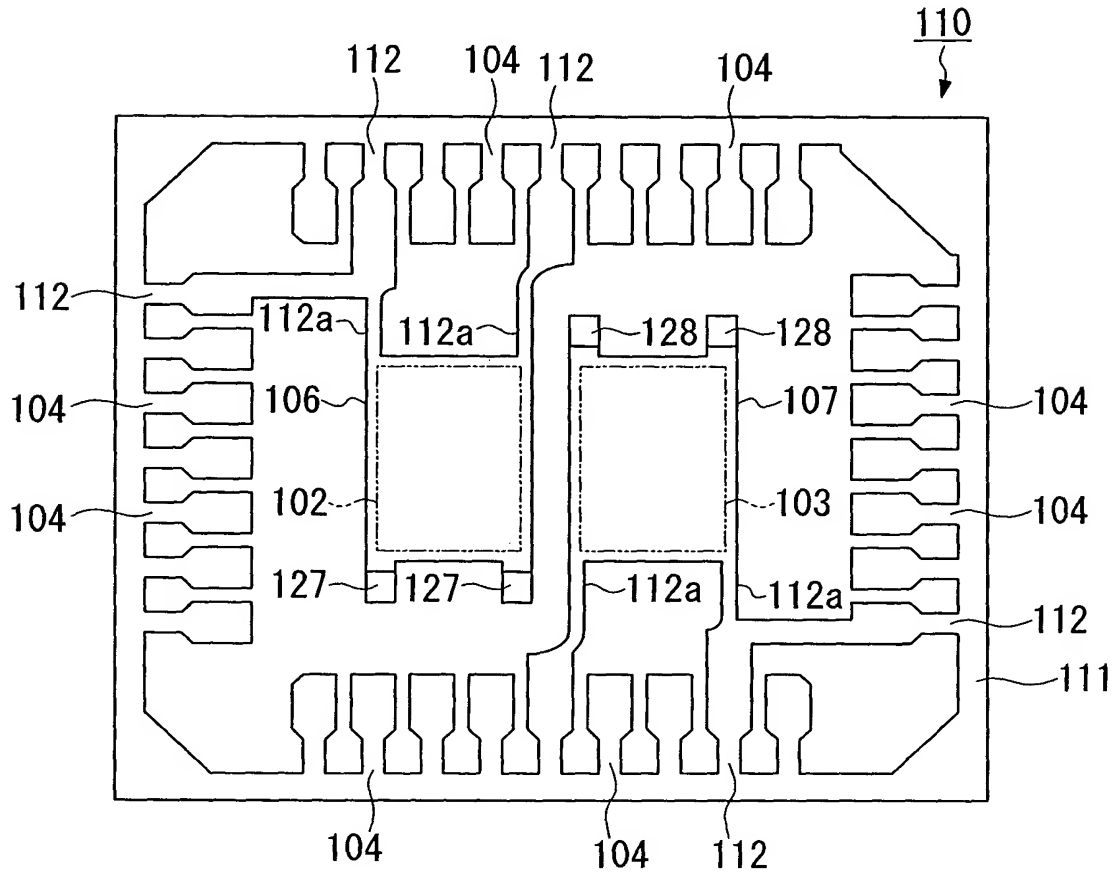


FIG. 42

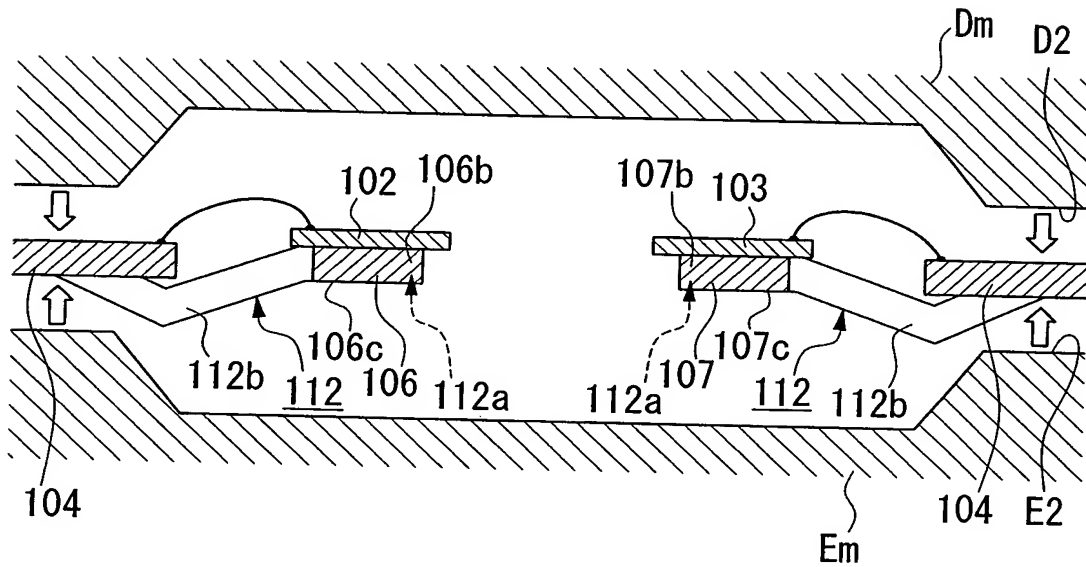


FIG. 43

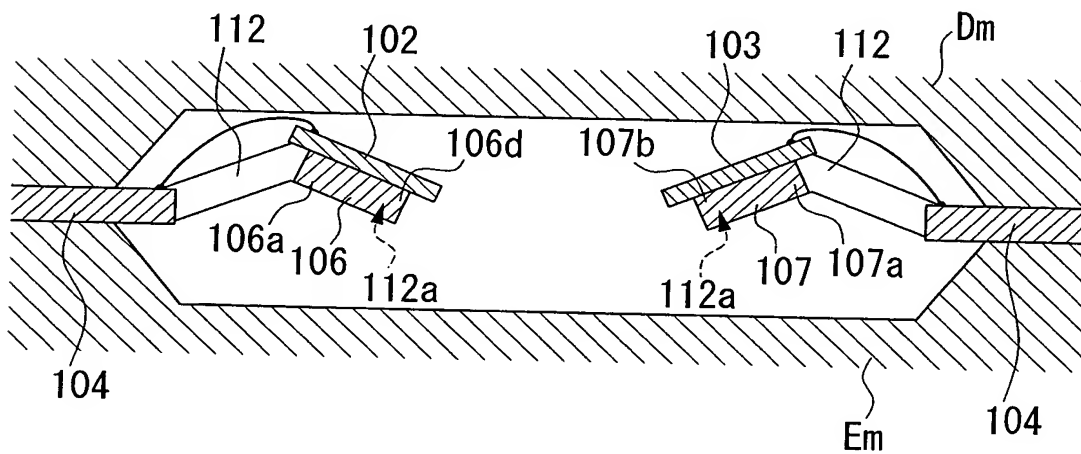


FIG. 44

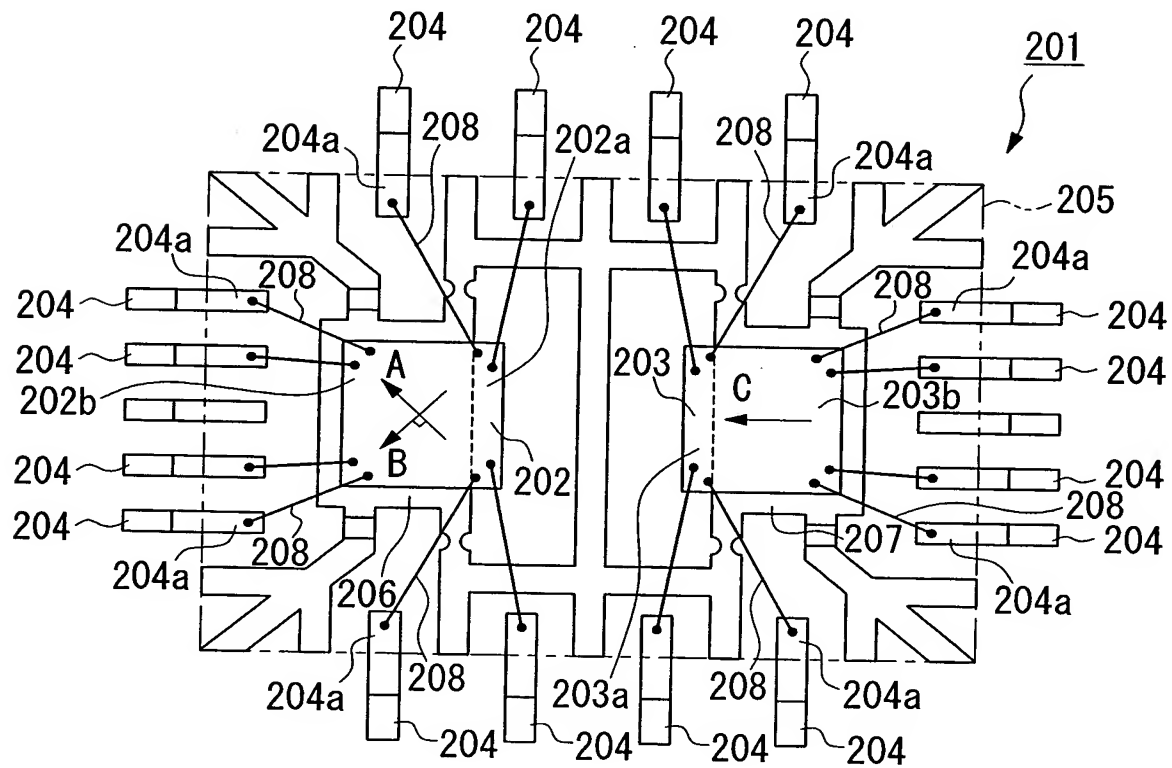


FIG. 45

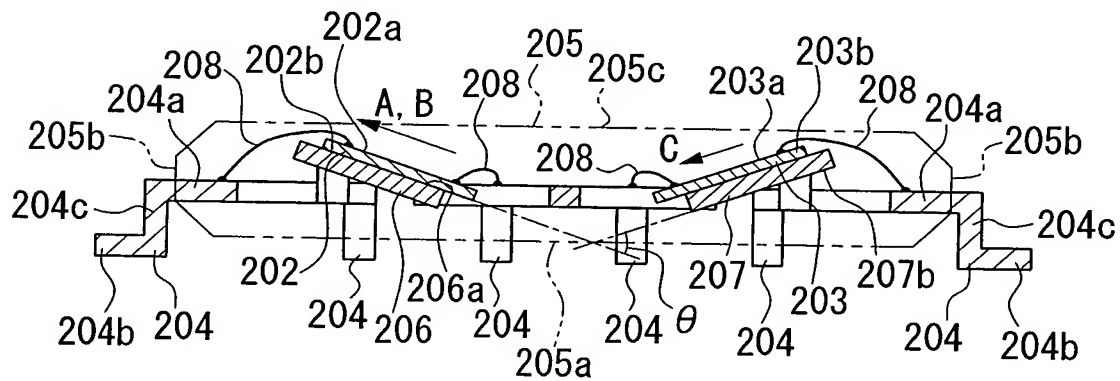


FIG. 46

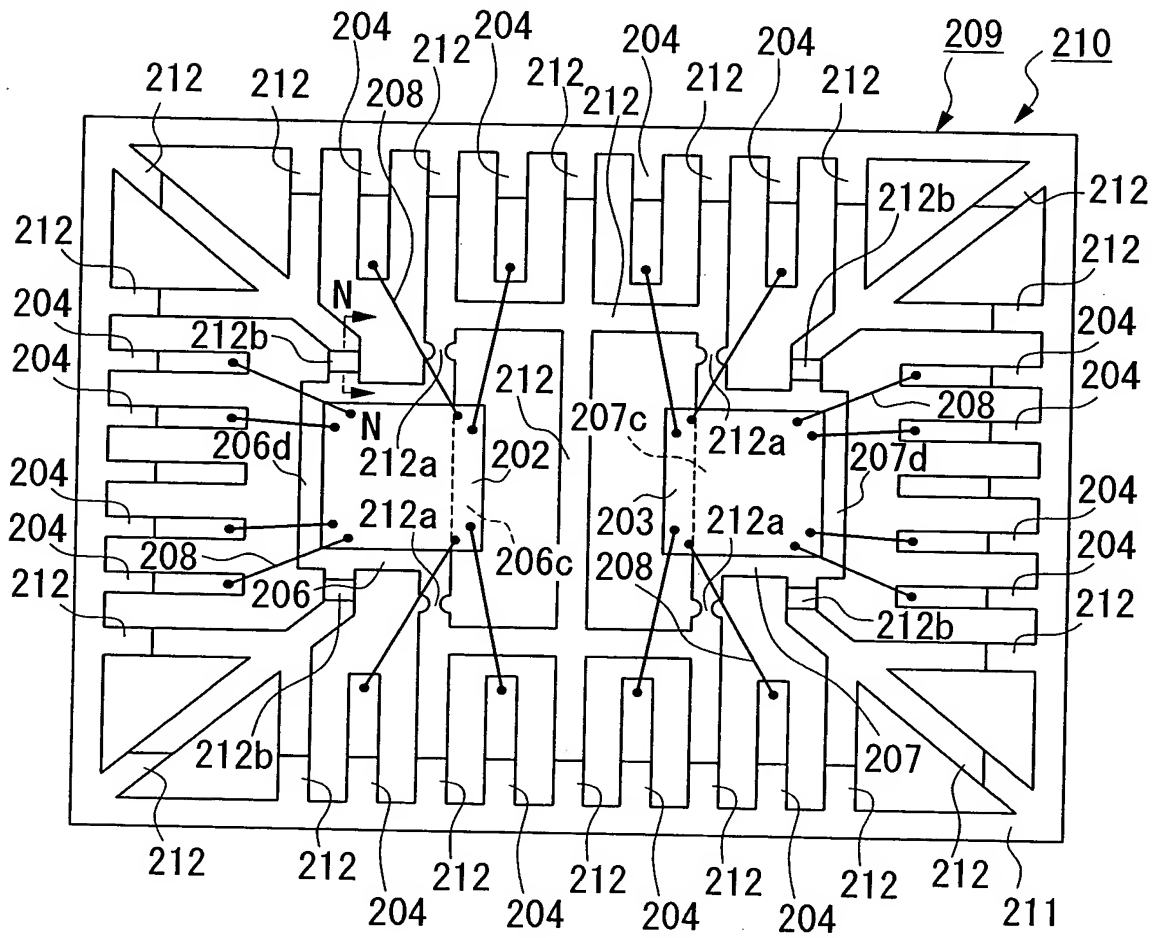


FIG. 47

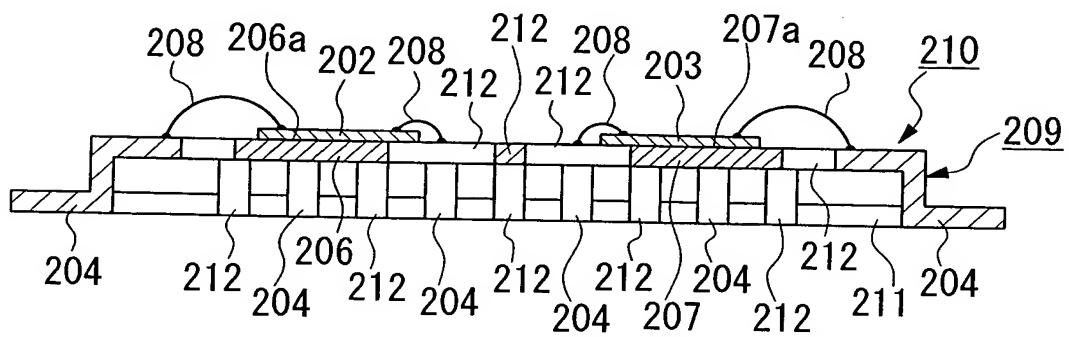


FIG. 48

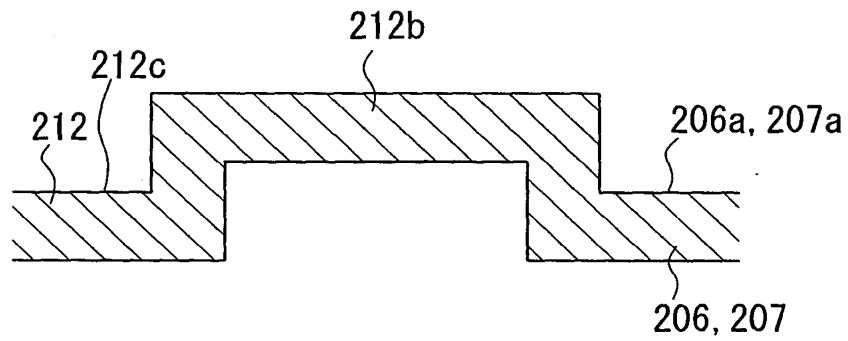


FIG. 49

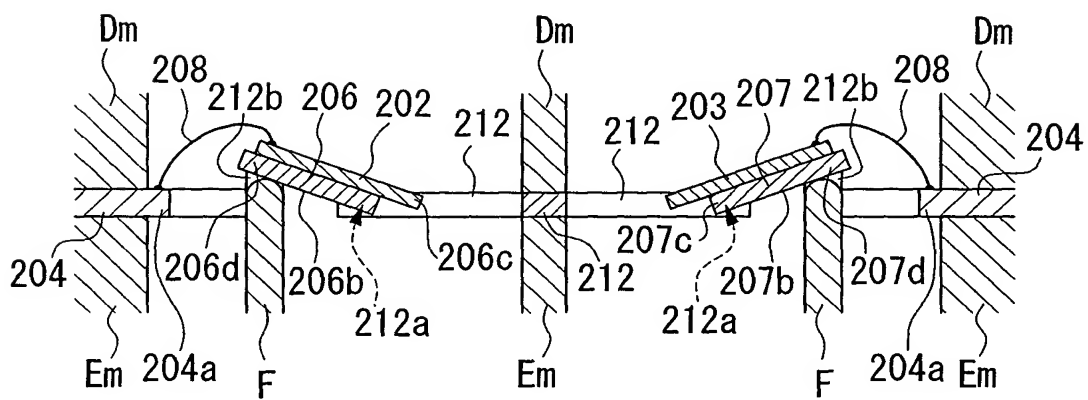


FIG. 50



FIG. 51

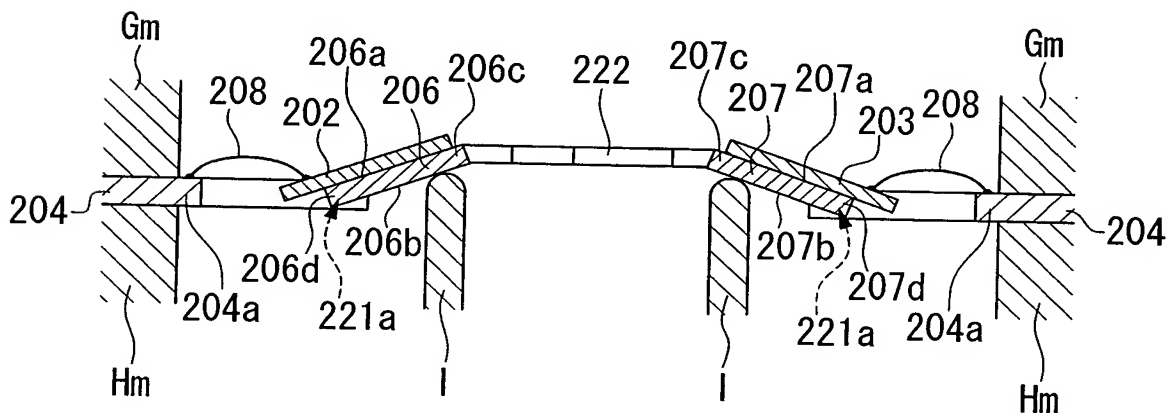


FIG. 52

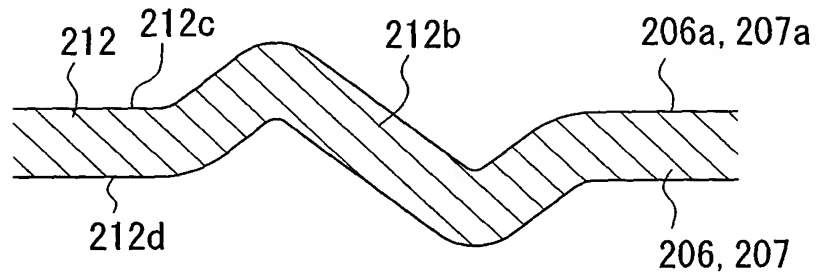


FIG. 53A

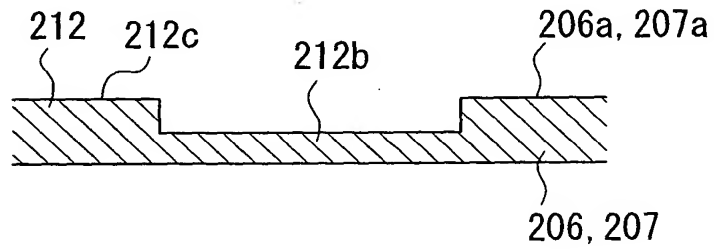


FIG. 53B

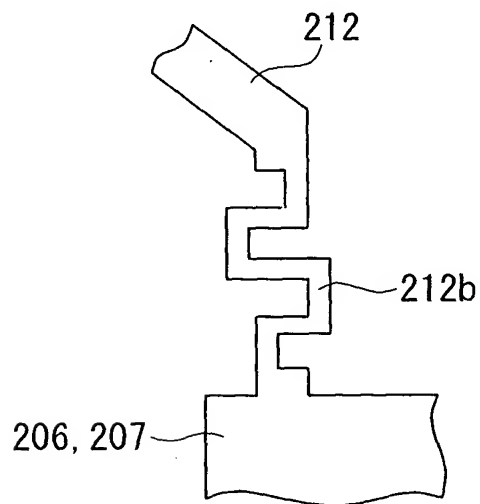


FIG. 53C

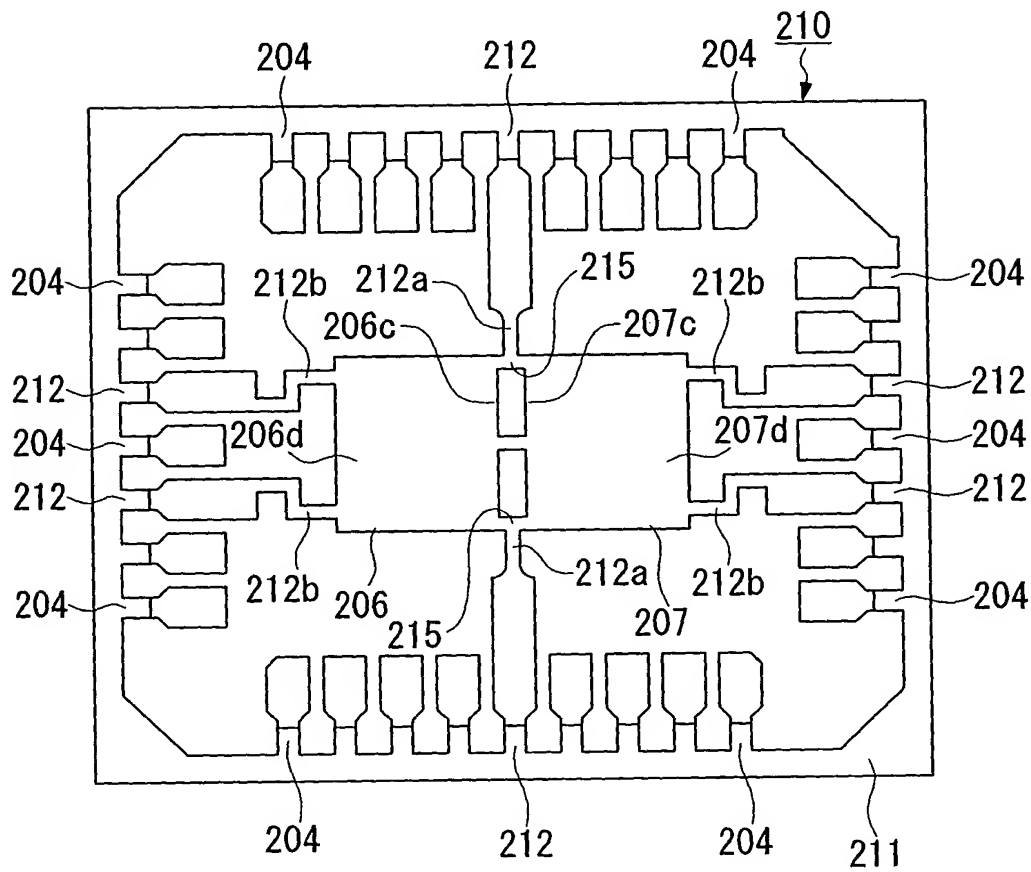


FIG. 54

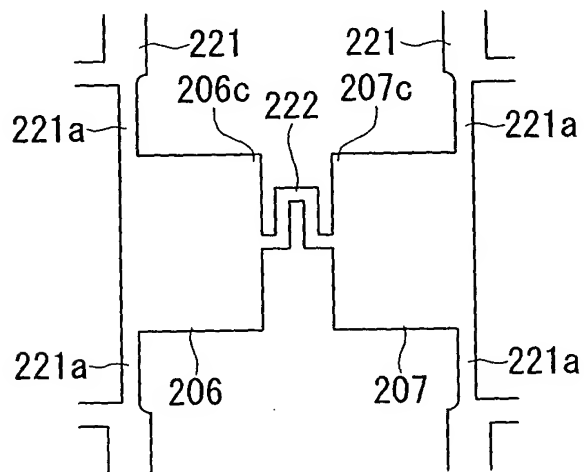


FIG. 55

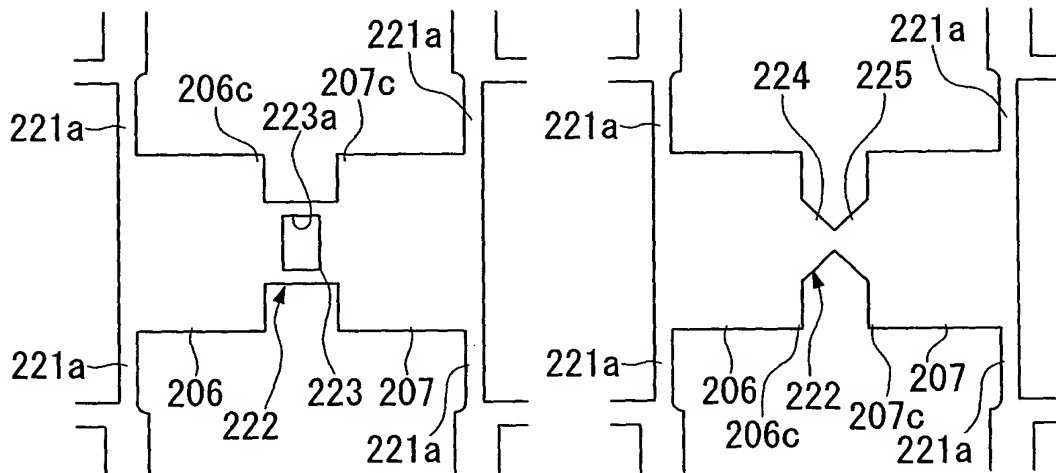


FIG. 56A

FIG. 56B

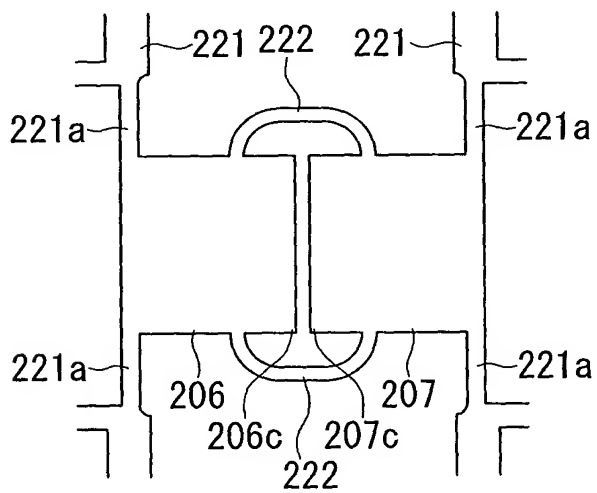


FIG. 57

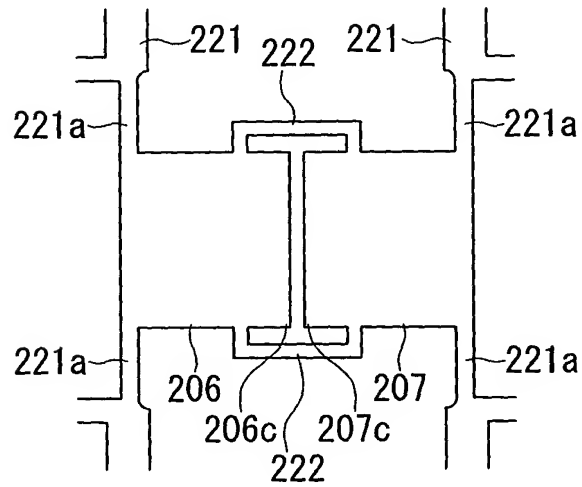


FIG. 58

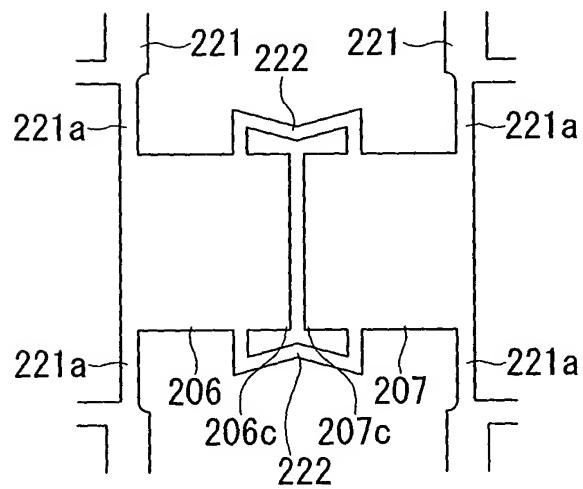


FIG. 59

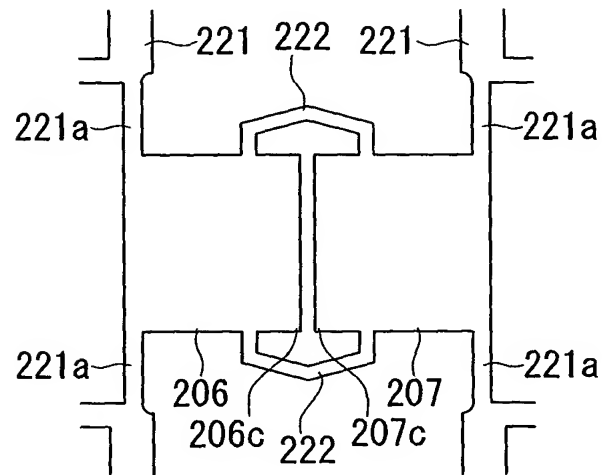


FIG. 60

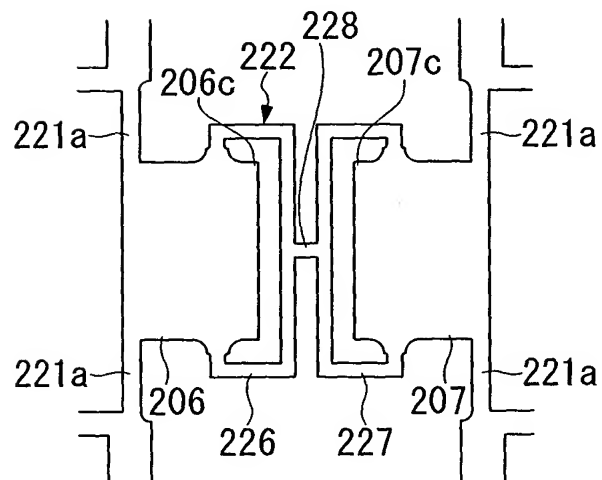


FIG. 61



FIG. 62

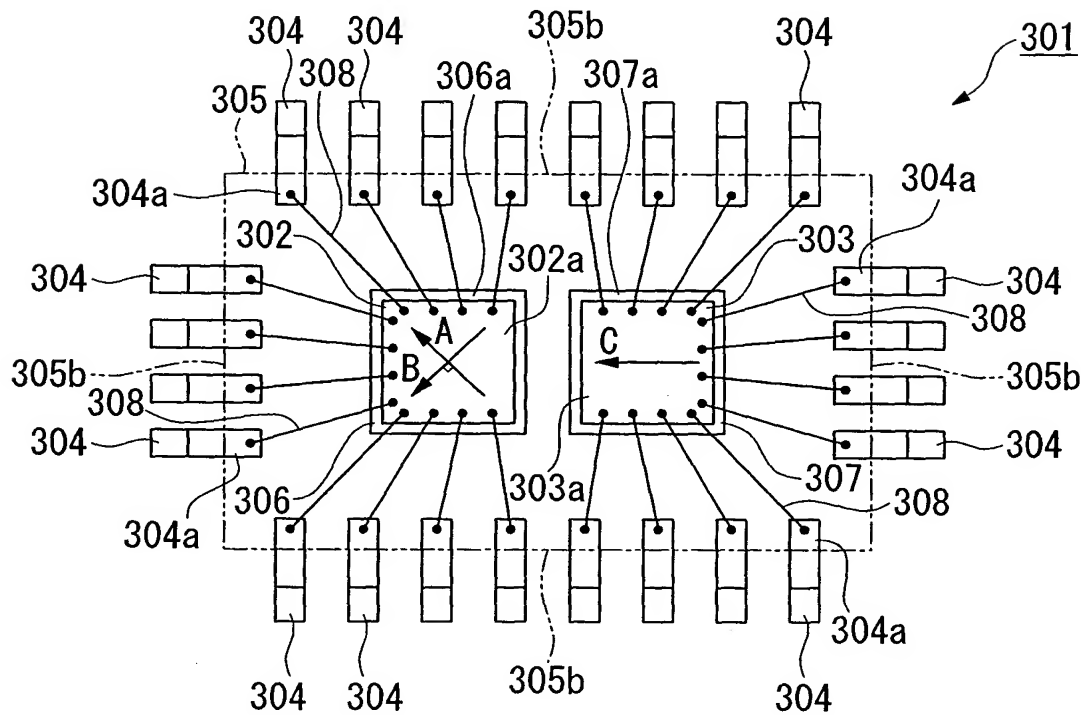


FIG. 63

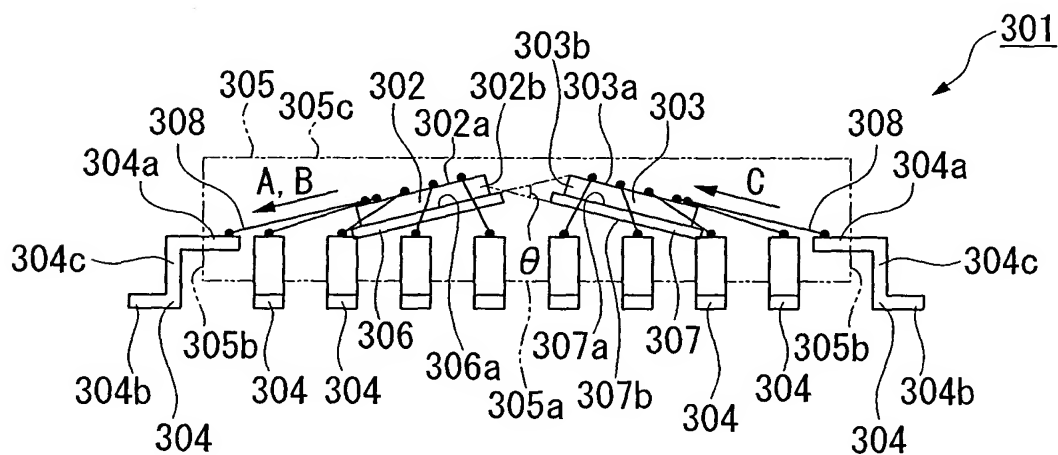


FIG. 64

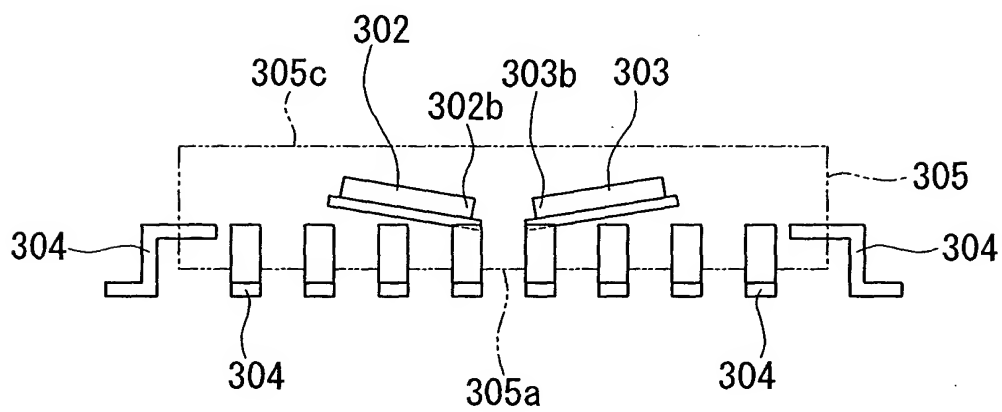


FIG. 65

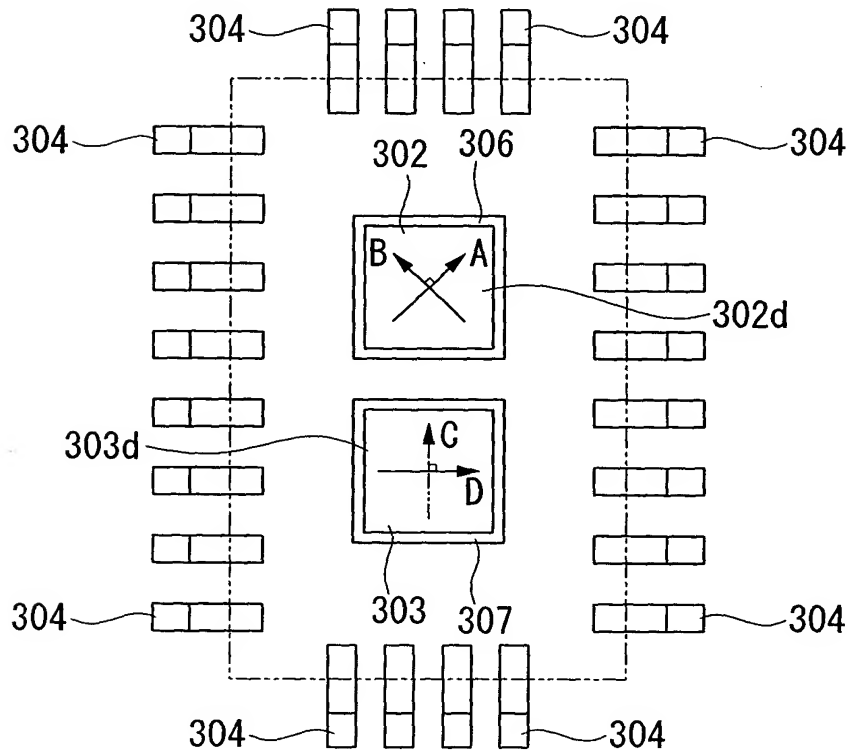


FIG. 66

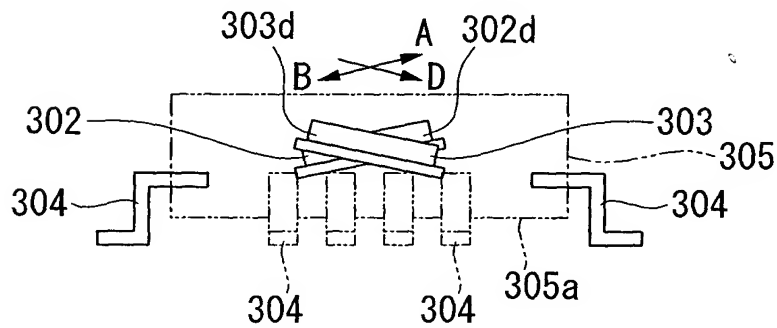


FIG. 67

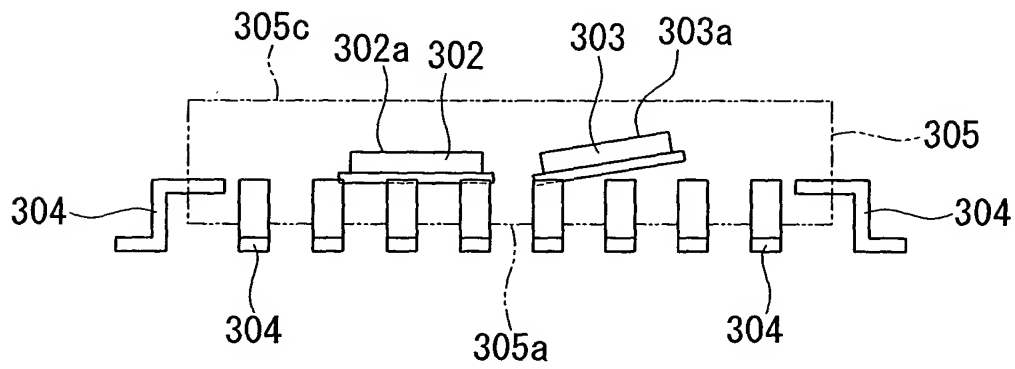


FIG. 68

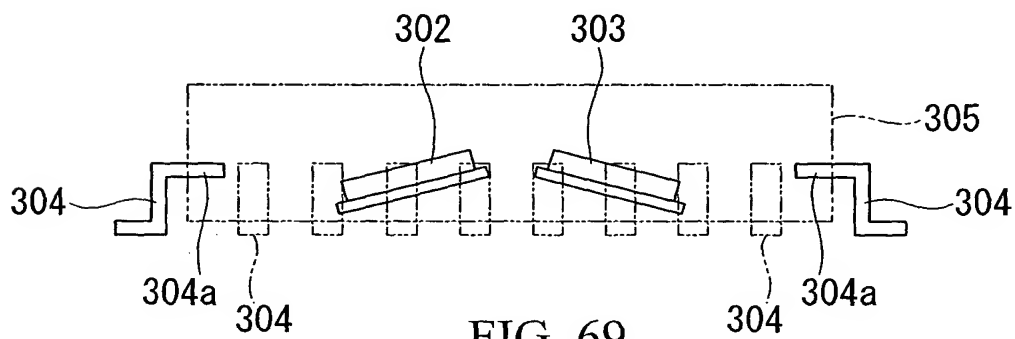


FIG. 69

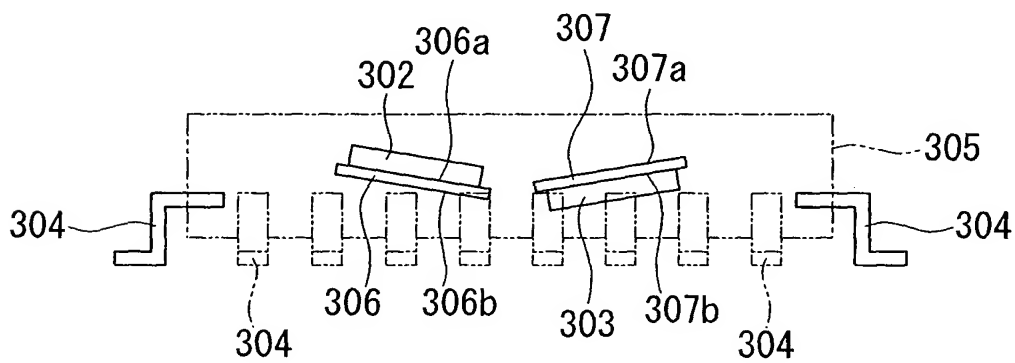


FIG. 70

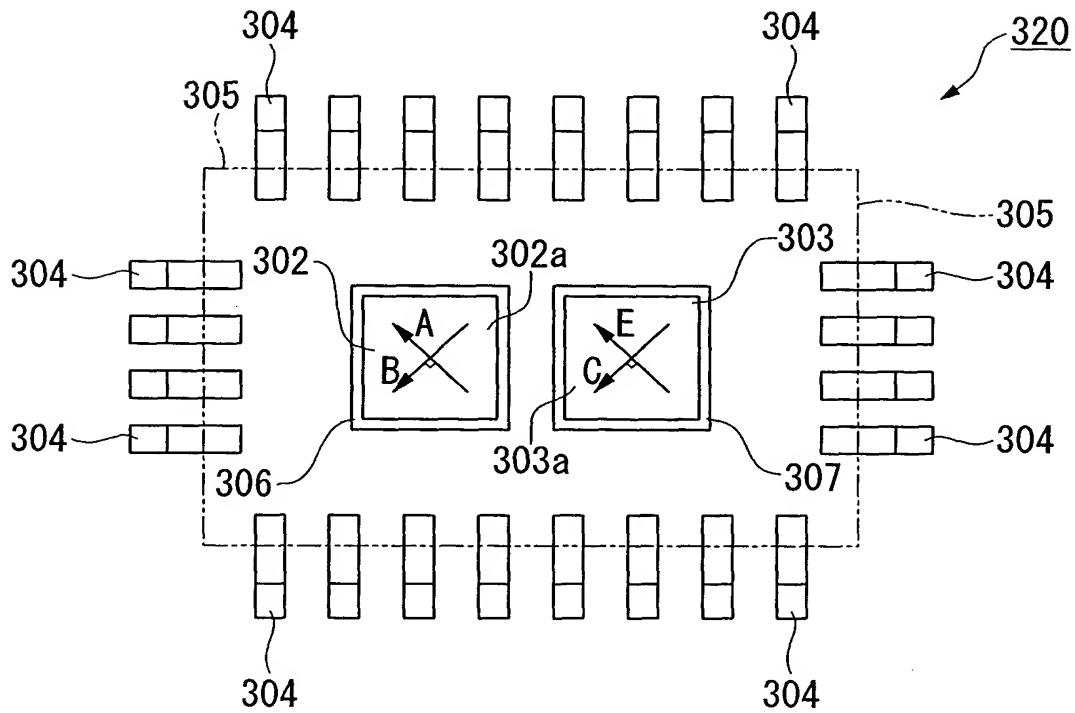


FIG. 71

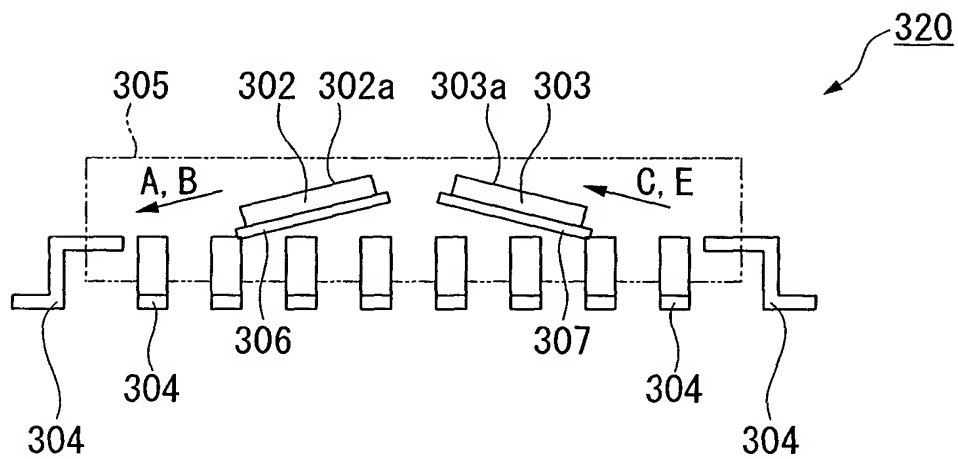


FIG. 72

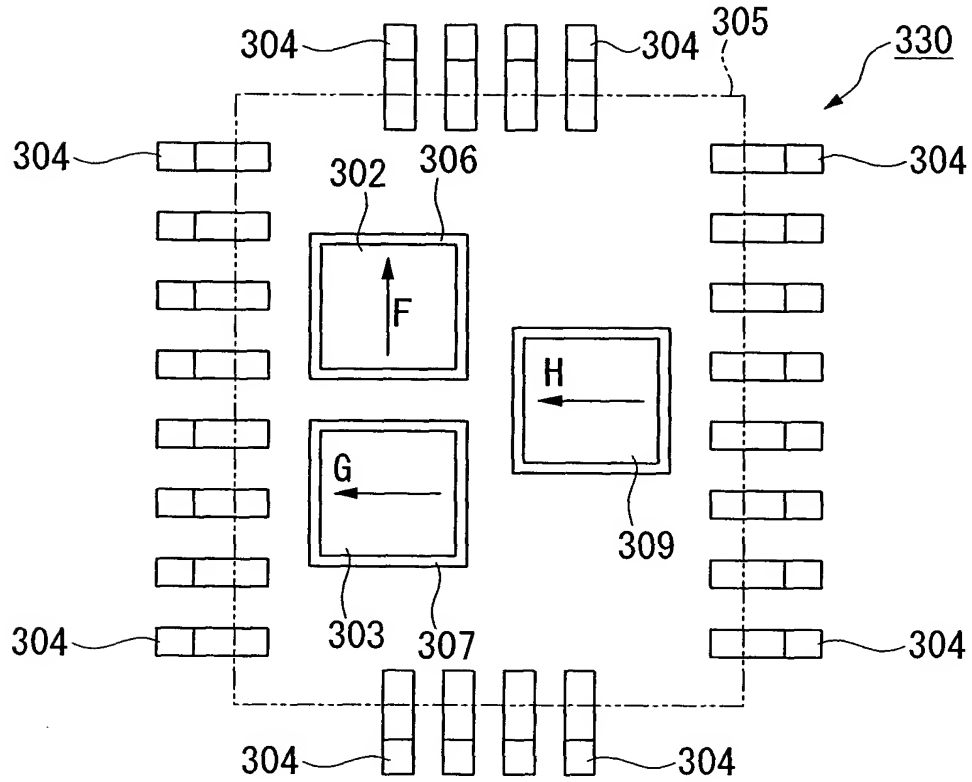


FIG. 73

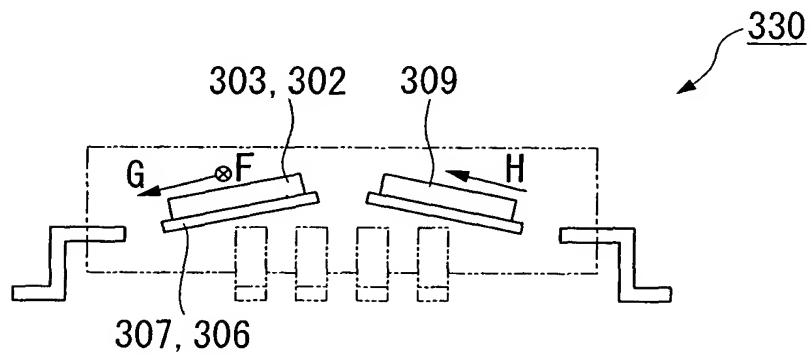


FIG. 74

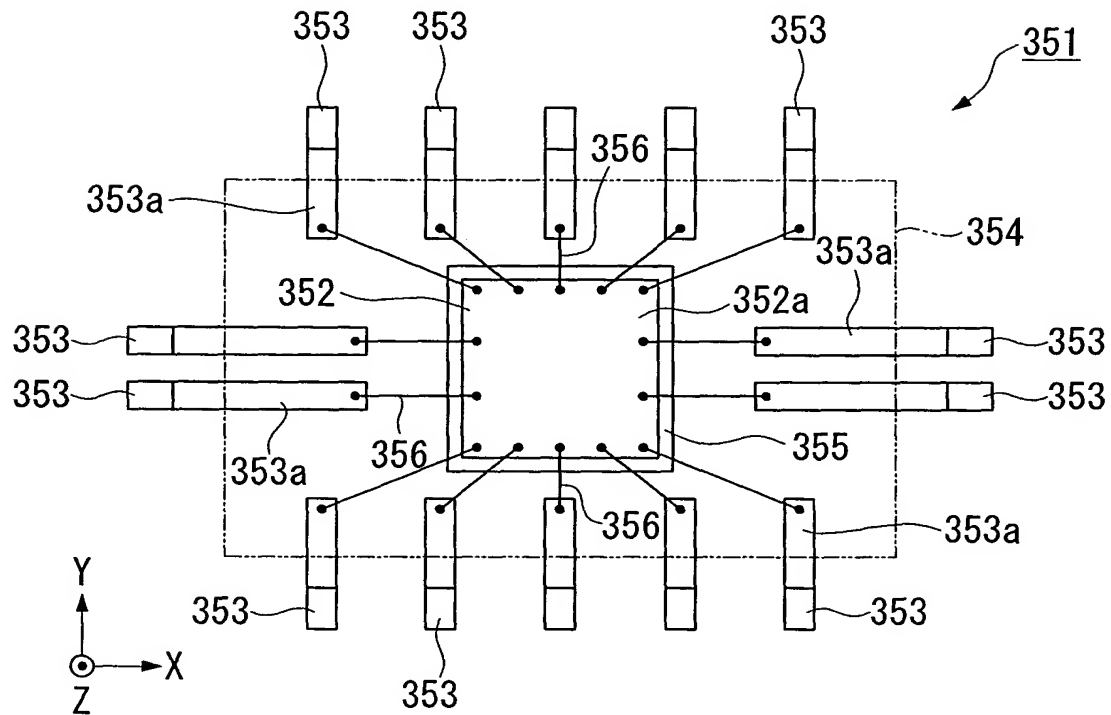


FIG. 75

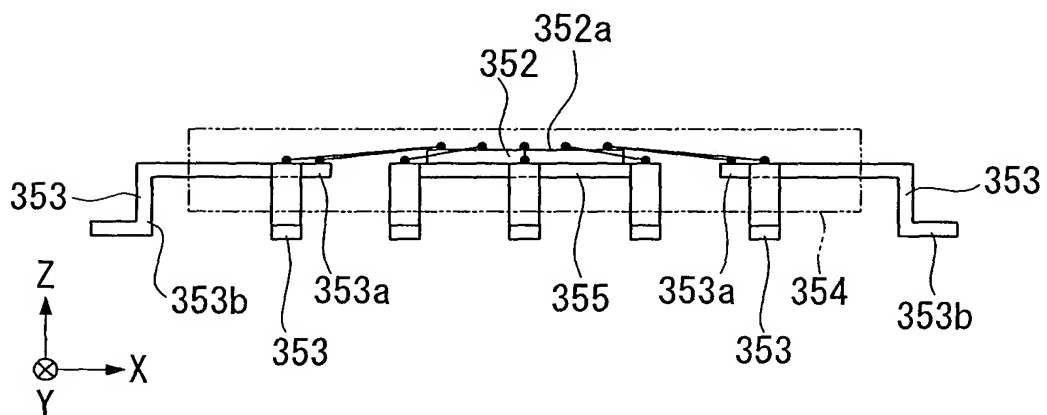


FIG. 76

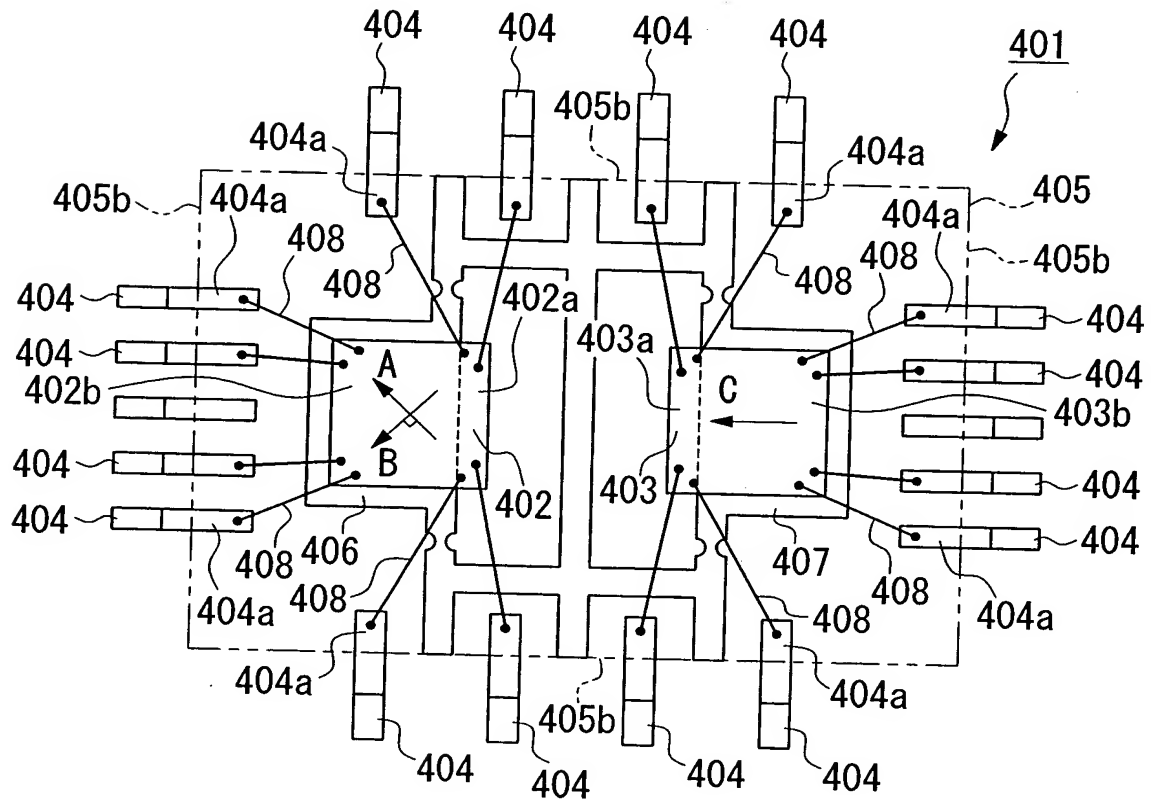


FIG. 77

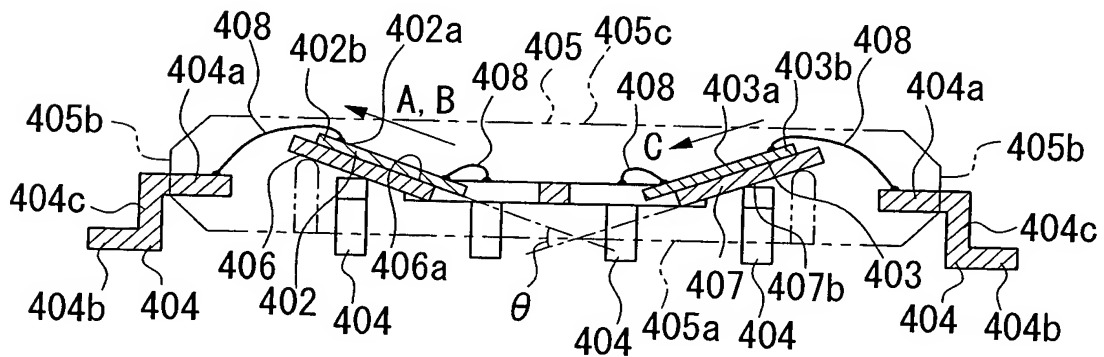


FIG. 78

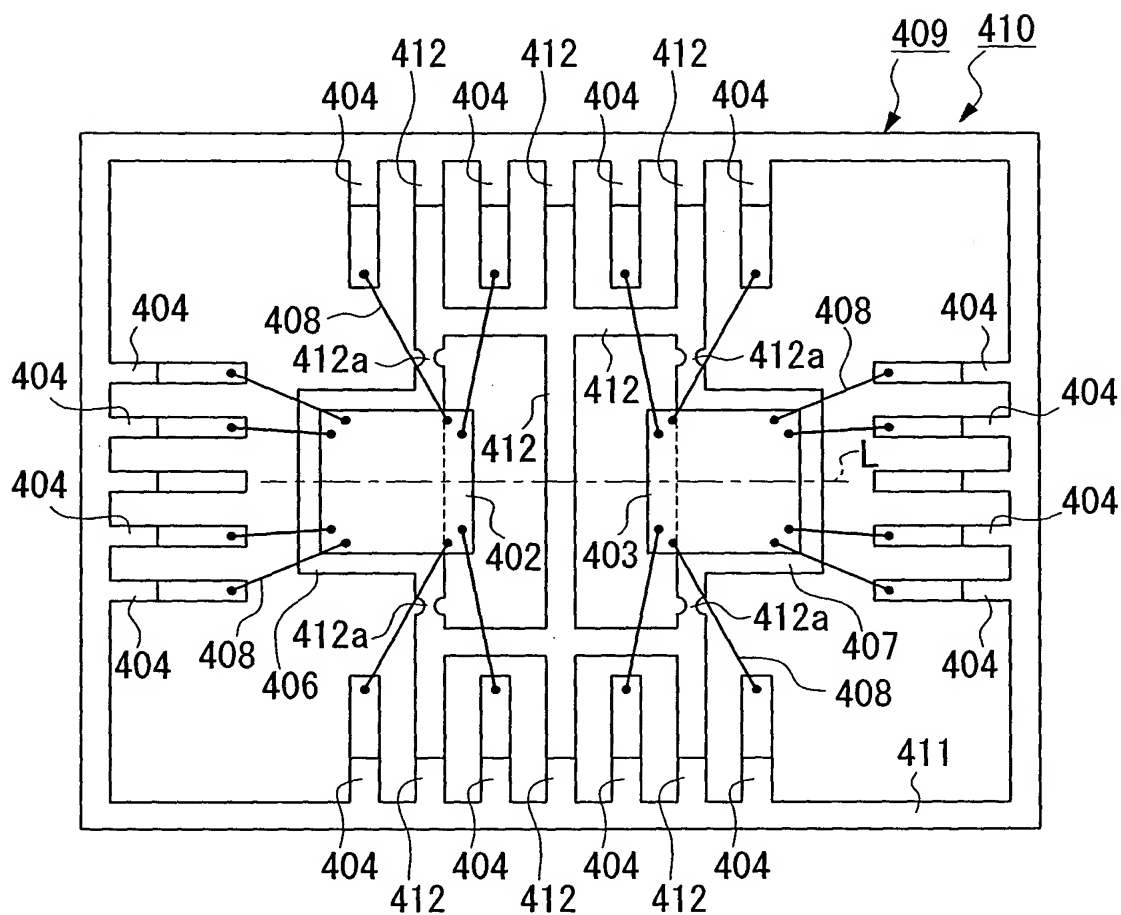


FIG. 79

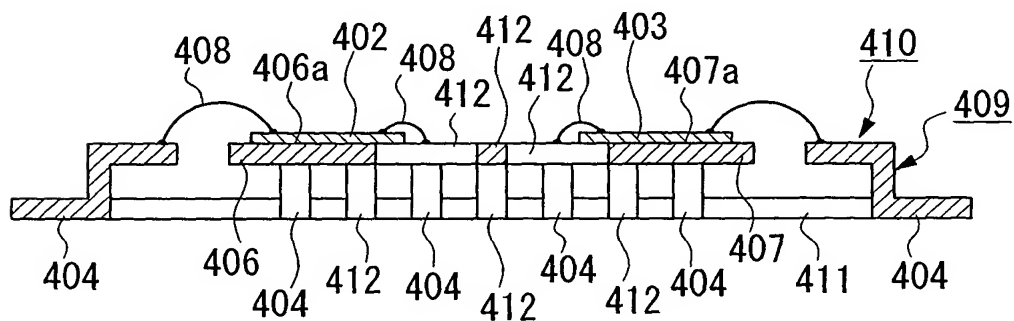


FIG. 80

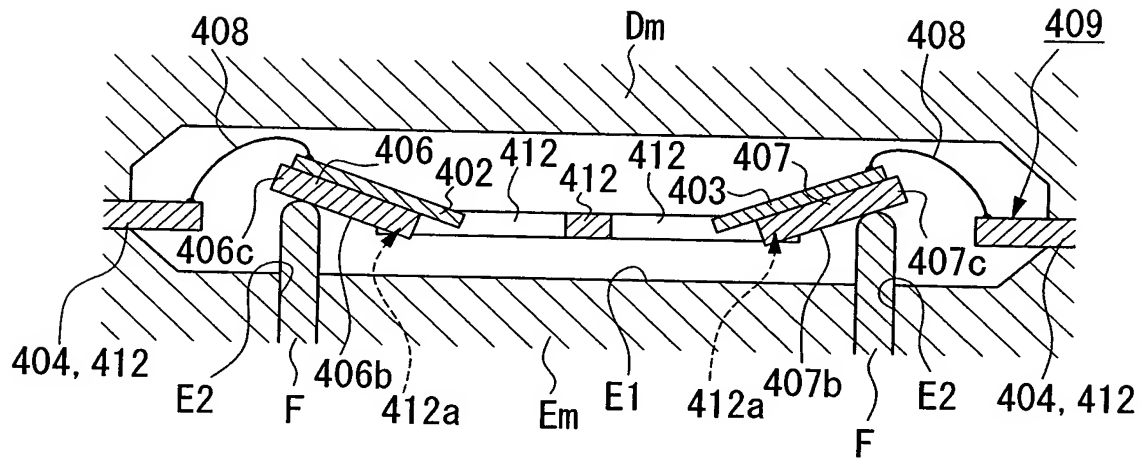


FIG. 81

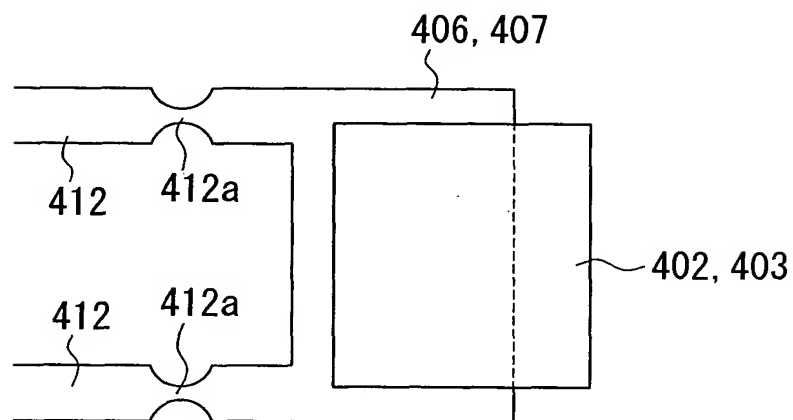


FIG. 82A

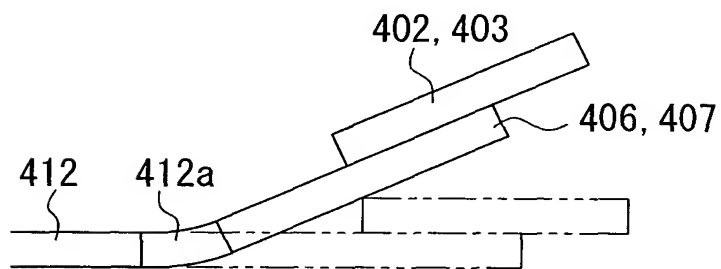


FIG. 82B

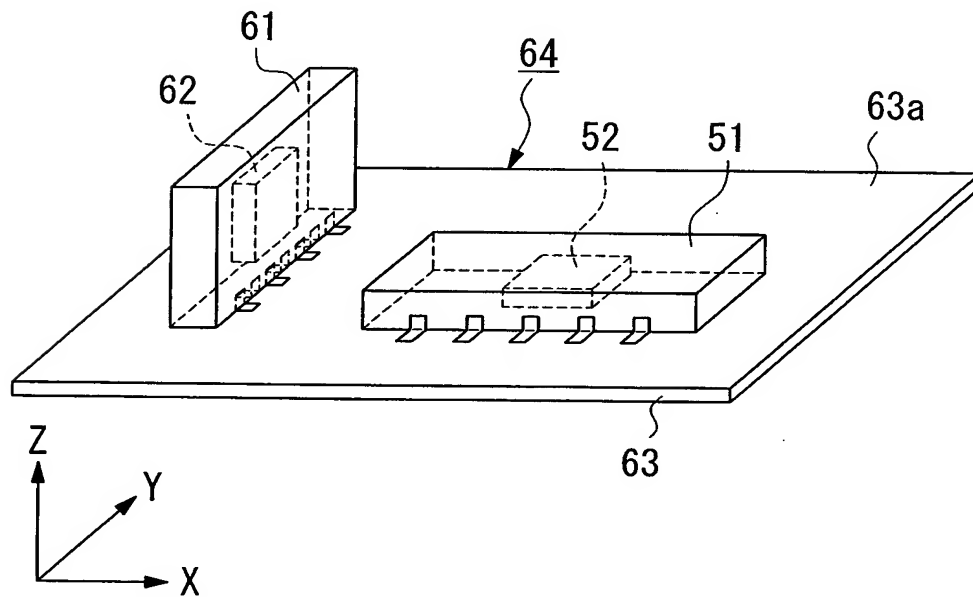


FIG. 83
 (PRIOR ART)

CONDITION	BEARING a
$S_a > 0$ & $ S_a > S_b $	$a = \tan^{-1} (-S_b/S_a)$
$S_a < 0$ & $ S_a > S_b $	$a = 180^\circ (-S_b/S_a)$
$S_a < 0$ & $ S_a < S_b $	$a = 90^\circ (-S_a/S_b)$
$S_a > 0$ & $ S_a < S_b $	$a = 270^\circ (-S_a/S_b)$

FIG. 84

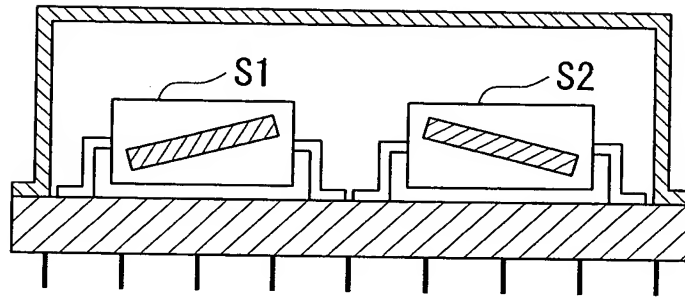


FIG. 85A

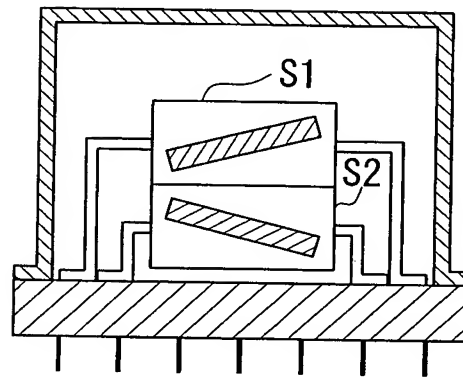


FIG. 85B

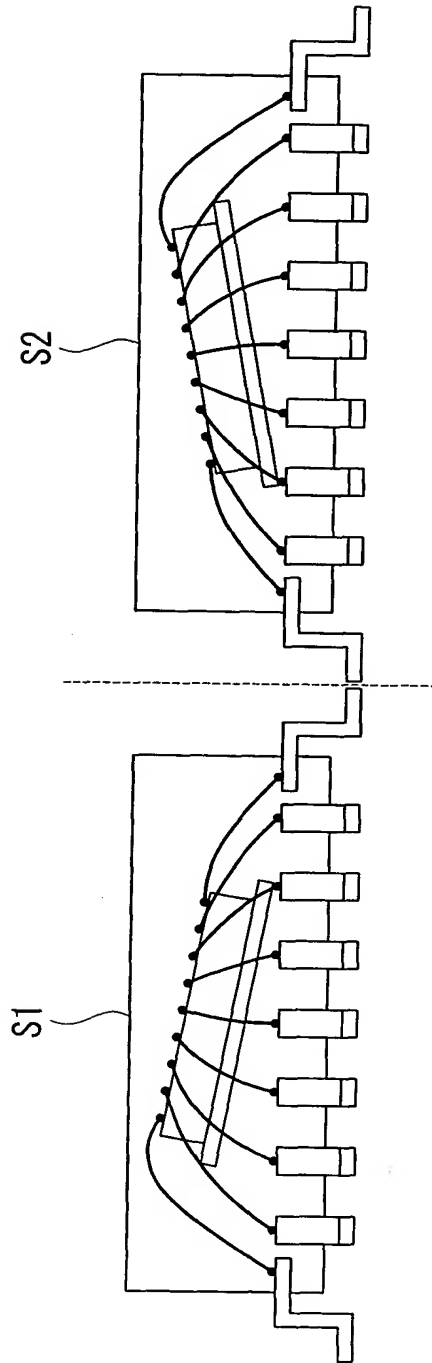


FIG. 86

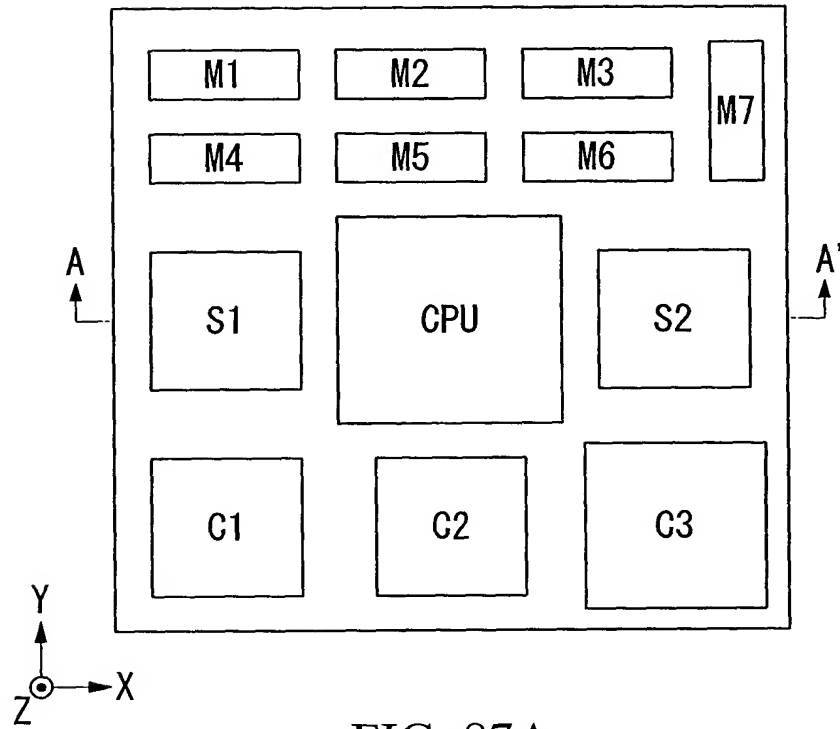


FIG. 87A

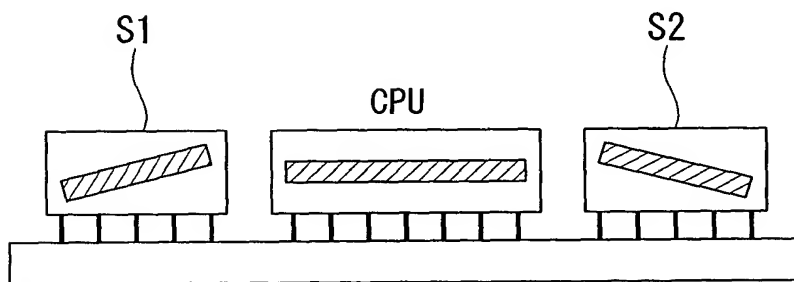


FIG. 87B

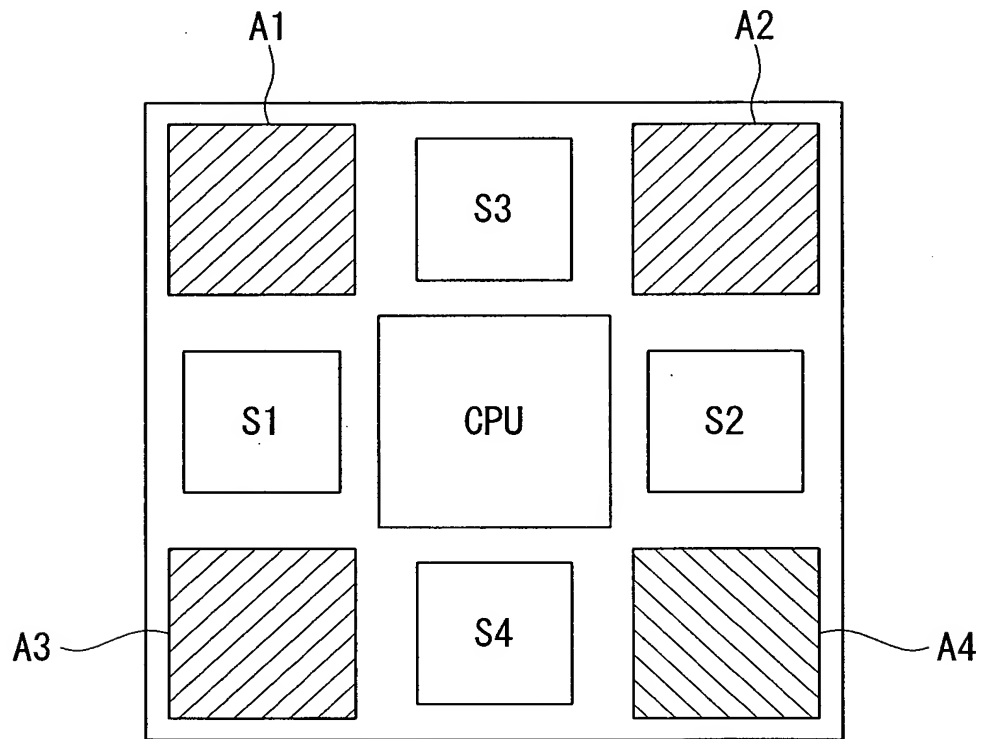


FIG. 88

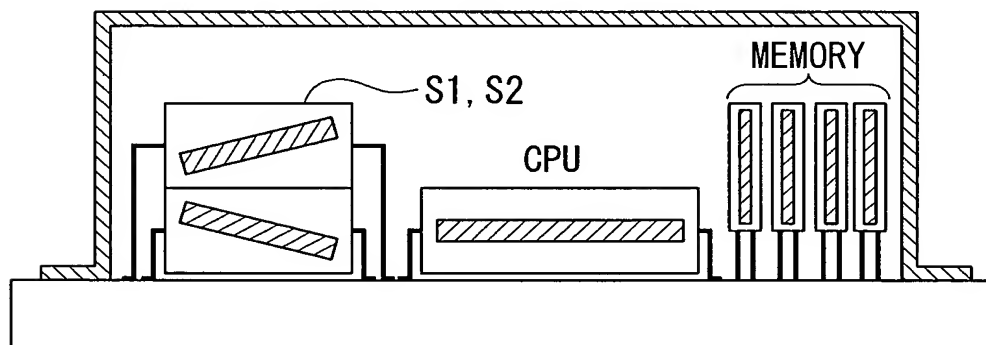


FIG. 89

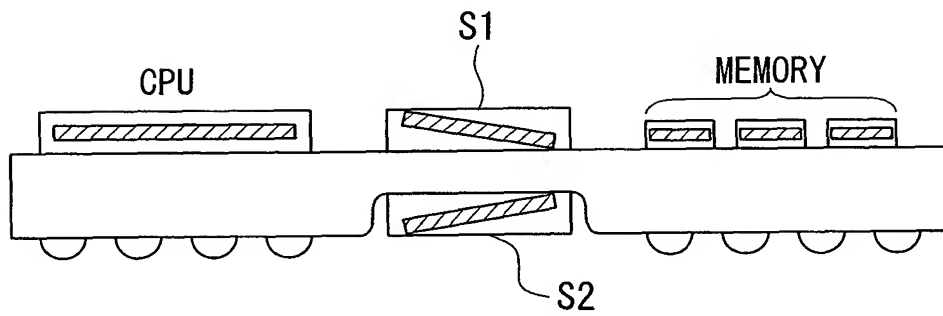


FIG. 90

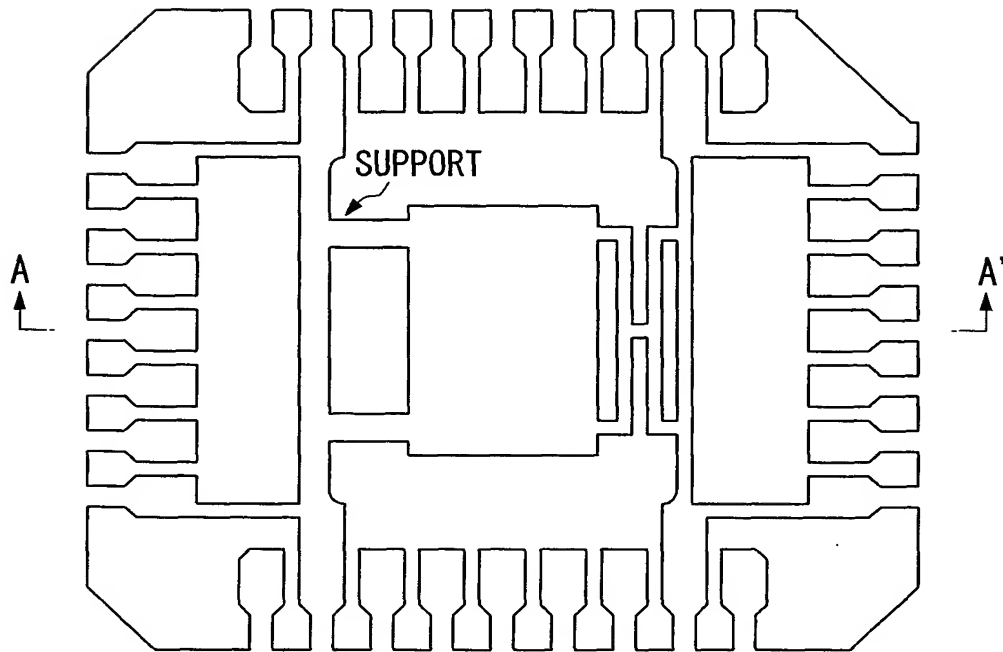


FIG. 91A




FIG. 91B

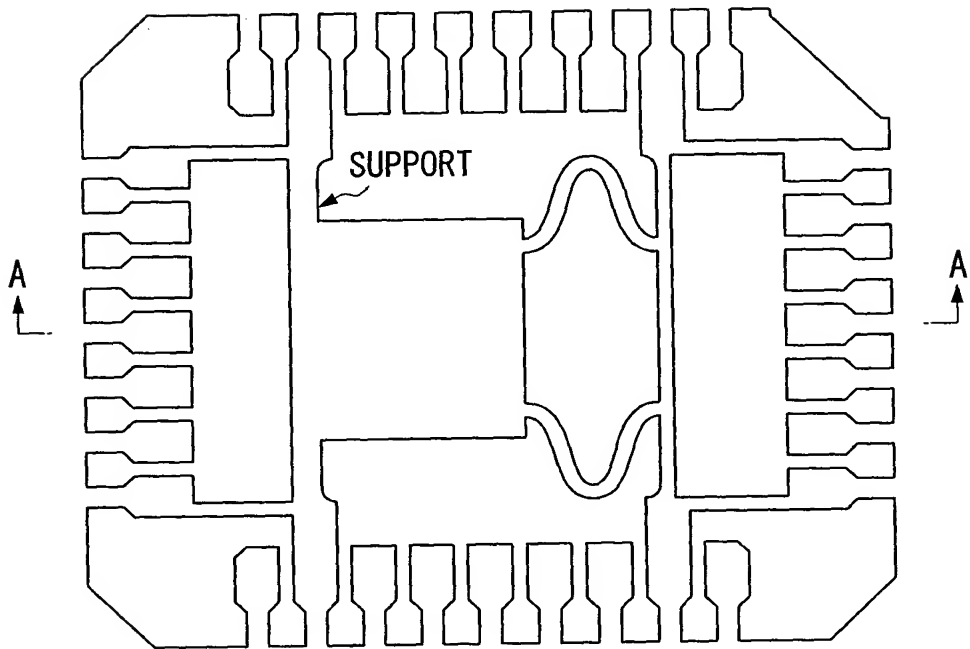


FIG. 92A




FIG. 92B

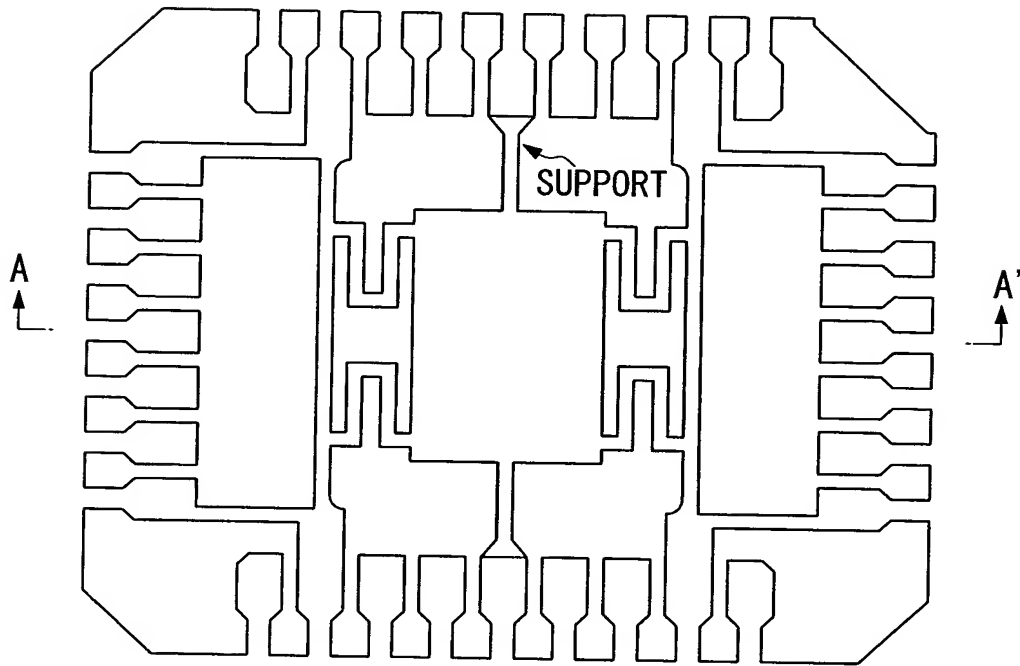


FIG. 93A




FIG. 93B

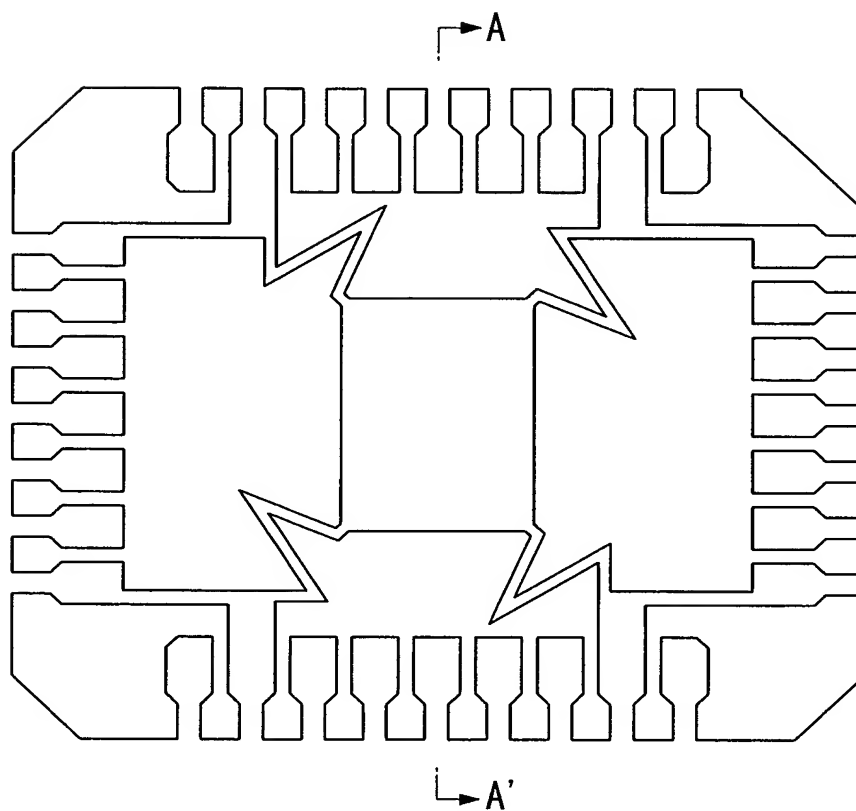


FIG. 94A



FIG. 94B

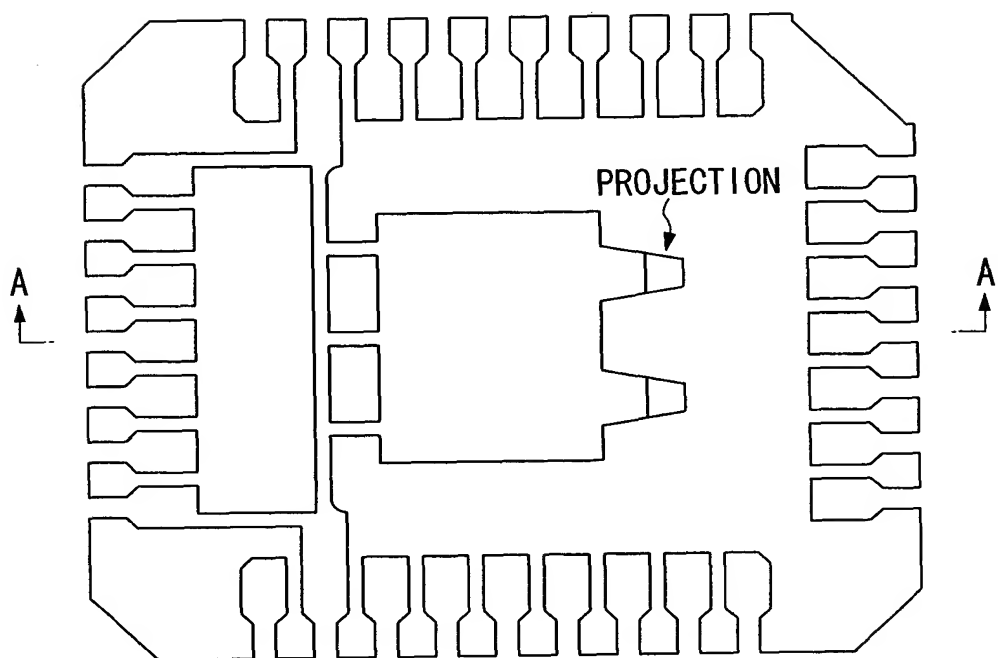


FIG. 95A




FIG. 95B

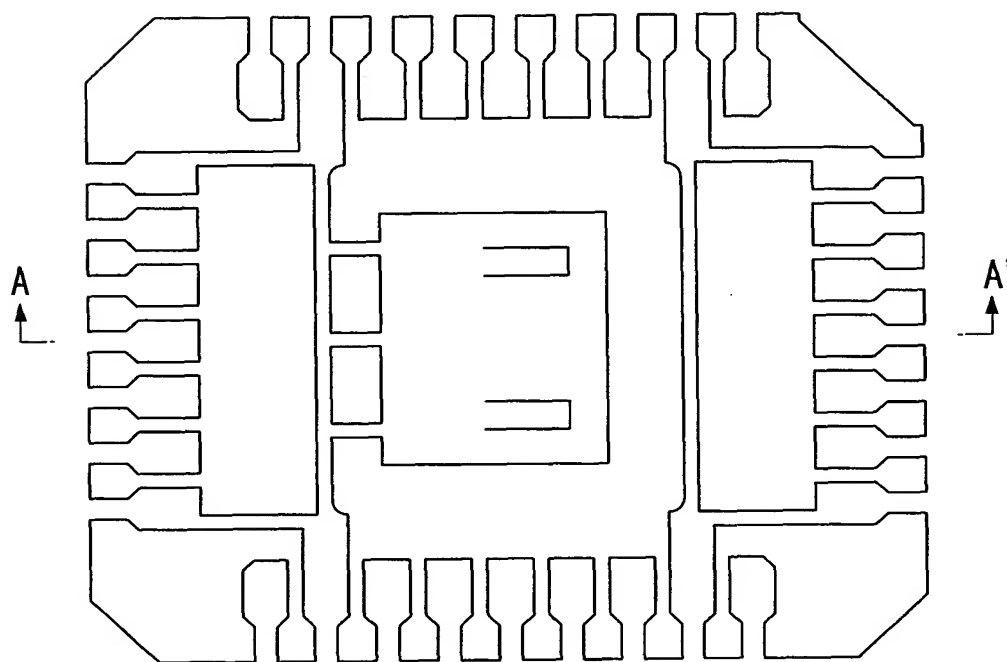


FIG. 96A




FIG. 96B

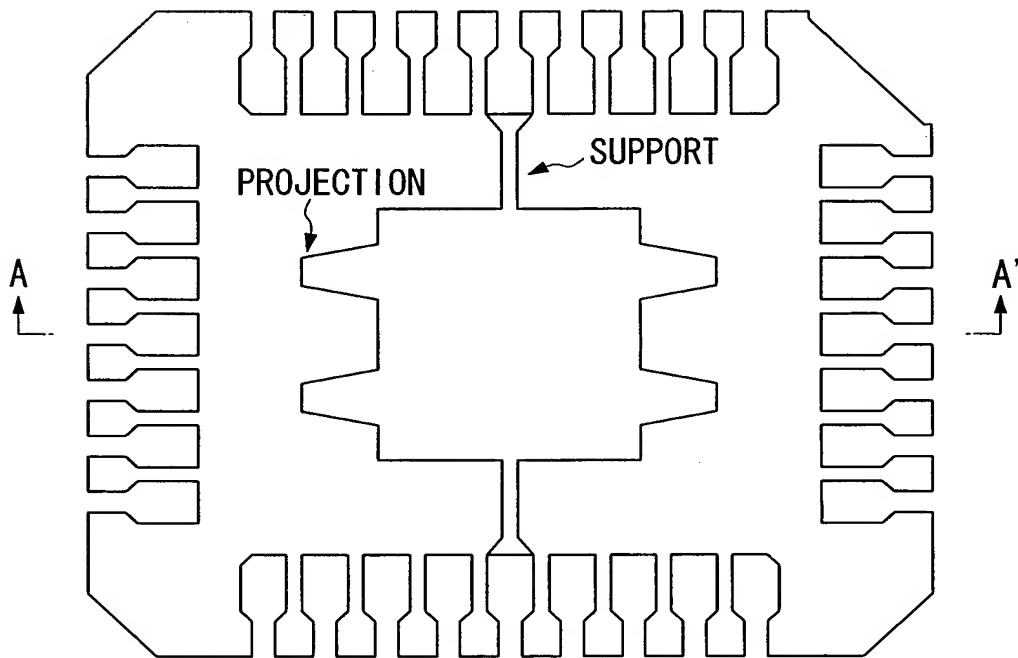


FIG. 97A




FIG. 97B